

Utilising Nature's Gift.

WHOLESALE CATALOGUE
skyspan.com.au



SKYSPAN
AUSTRALIA PTY LTD



SKYSPAN
AUSTRALIA PTY LTD

Skyspan is an Australian owned and operated family business which began operations in 1980. We have gained a reputation of producing the highest quality in skylight products due to our in-house design, manufacturing, and quality control, backed with customer service second to none.

We offer a complete range of products ranging from small tubular skylights through to large architectural concepts suitable for any modern residential or commercial requirement.

We stand behind every product we manufacture. Our confidence in the quality of our products proven by the fact we offer a 7 year warranty across our range.

The Skyspan Team



DESIGNED AND MANUFACTURED
IN AUSTRALIA

Skyspan Product Range

Sunpipe Flex	4
Sunpipe Blaze	7
Traditional Skylights	8
Flexible Shaft Skylight Kit	12
TFD Frame & Dome	14
TFG Frame & Glass	15
Skyspan GSL Fixed	16
Skyspan GSW Opening	18
Velux Skylights	20
Velux Pitched Roof Skylight Flashing - Pitch <15°	22
Velux Pitched Roof Skylight Flashing - Pitch >15°	24
Velux Flat Roof Skylight Flashing - Pitch <5°	26
Velux Flat Roof Skylight Flashing - Pitch >5°	28
Velux Roof Window Flashing - Pitch >15°	30
Pyramid Skylights - Polymer	32
Circular Skylights - Polymer	34
Domelinks®	36
Roof Access Hatches	38
Cyclone Hatch	42
Metal Lid Hatch Electric Opening	43
Skylight Hatch	44
Ezi-Slider Hatch®	46



The Skyspan Sunpipe Flex skylights is one of the most economical and cost effective ways of utilising nature's gift and providing natural light and ventilation to any room. The highly reflective flexible shaft carries natural light directly to your room providing an atmosphere of freshness and vitality.



Sunpipe Flex™

The flexible shaft eliminates the need for a costly light shaft construction and gives the ability to navigate around obstructive roof structures or resolve the complication of the ceiling penetration not directly aligning with the roof penetration and thereby saves both time and money.

- One-piece leakproof flashing
- High performance – more light with less heat
- Ray attractor refracts low level light increasing efficiency
- Australian made quality



The Skyspan Sunpipe Flex Skylight is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.



WHERE TO USE

Suitable for any room where structurally compatible.

Ideal for:



VENTILATION TYPES

Non Vented The Skylight has no ventilation system. This is the standard Skylight and is used in most rooms.

Passive Ventilation The frame under the dome is perforated, this allows for hot air to naturally rise, taking with it steam and odors are drawn outside. Only available in 400mm.



Concave Diffuser

Available in both Prisma[®] & WarmGlo[®]



Flat Diffuser

Available in both Prisma[®] & WarmGlo[®]

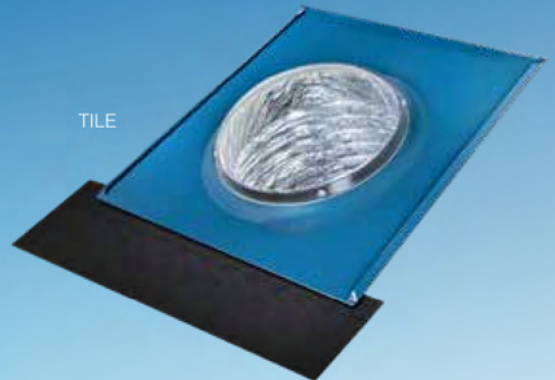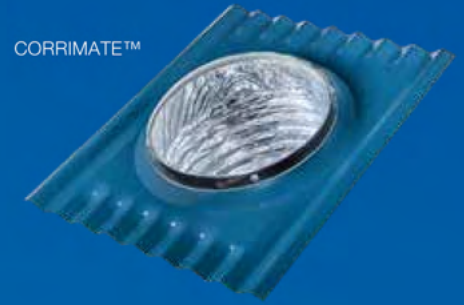

SIZING

Dimensions in millimeters.

Non Vented	Vented
300 Ø	400 Ø
400 Ø	
500 Ø	
	Shaft Length
	2000
	3000

DIFFUSER TYPES

Prisma[®] The standard diffuser is a Clear Prismatic Diffuser that eliminates glare and produces an even spread of light by the female conical prism refracting properties.

WarmGlo[®] The option diffuser is available in both flat and convex shape. The WarmGlo Diffuser is a frosted white translucent diffuser that eliminates glare and produces a bright light that is softened for visual comfort.



Prisma[®]



WarmGlo[®]



INCLUSIONS

- Flexible Shaft
- Collar
- Diffuser
- Ceiling Trim



MANUFACTURE

Flashing and Frame

STANDARD MATERIALS

0.75mm Zinalume® steel for superior strength.

STANDARD FINISH

Mill

CUSTOM FINISH

Powder coated to match Colorbond® colour range.

Dome

STANDARD MATERIALS

Formed 3mm acrylic

STANDARD COLOUR

Clear




RAY ATTRACTOR

Skyspan Sunpipe products feature a MIRO-SILVER® Ray Attractor band at the top of the shaft. With a mirror like reflective surface of 98% light reflectivity this catches the sun's rays and bounces them down the shaft. The Ray Attractor is most effective at low sun angles of morning and afternoon, allowing daylight to illuminate your rooms for extra hours each day.

TYPICAL INSTALLATION

Roof pitch range:  0°-45°

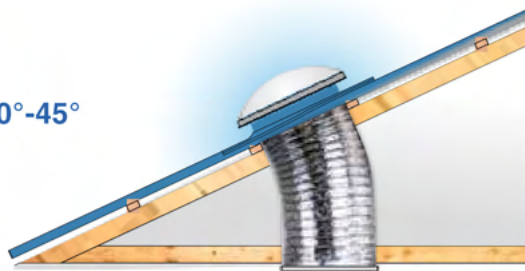

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/sunpipe-tubelight



ENERGY RATING*

VLT 98% / SC .098 / SHGC .85 / U-Value 5.5



BAL RATING - LOW

Complies with Bushfire AS 3959-2009

* Energy rating figures refer to clear acrylic glazing only.

Sunpipe Blaze has been specifically designed for Australian bushfire areas. In place of the Standard Acrylic Dome, Laminated Safety Glass is provided to give a non-combustible lining to the roof to repel burning bushfire embers. Shown here with Ember Guard installed.



The Skyspan Sunpipe Blaze is manufactured to comply with the Australia Standard AS1288 and is covered by a seven (7) year guarantee.

Sunpipe Blaze™

MANUFACTURE

Flashing and Frame

STANDARD MATERIALS

0.75mm Zinalume® steel for superior strength.

STANDARD FINISH

Mill

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

Glass

STANDARD COLOUR

Clear

STANDARD MATERIALS

10.38mm laminated safety glass.

Shaft

See Sunpipe Flex flexible shaft. Page 12.

Diffusers

See Sunpipe Flex diffuser options. Page 13.

TYPICAL INSTALLATION

Roof pitch range:  **0°-45°**



ENERGY RATING


VLT 98% / SC .098 / SHGC .85 / U-Value .98



BAL RATING - 29*

Complies with Bushfire AS 3959-2009

* Rating based on installations above 18°. Refer to Ember Guard above.

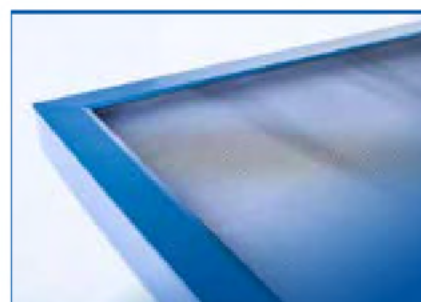

EMBER GUARD

An extra level of protection on roofs pitched below 18° and to meet BAL-29 requirements. The Skyspan Bushfire Ember Guard is manufactured from black stainless steel flyscreen mesh.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/sunpipe-tubelight


Traditional Skylights

The Traditional Skylight is the most common Skylight, it has proved itself in Australia's climate as a tough and resilient product for over 45 years.

A beautiful rich natural light is provided that is then softened and rounded by the opal dome that filters the harsh direct rays from the sun. Traditional Skylights are installed to the roof and connected to the room below by a Gyprock shaft. Rooms are provided with natural light and the option of ventilation, away from the exterior walls, in a cost and energy efficient way. The Traditional Skylight is designed for economy, a low roof silhouette and easy installation whilst bringing in abundant natural light.



The Skyspan Traditional Skylight is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.

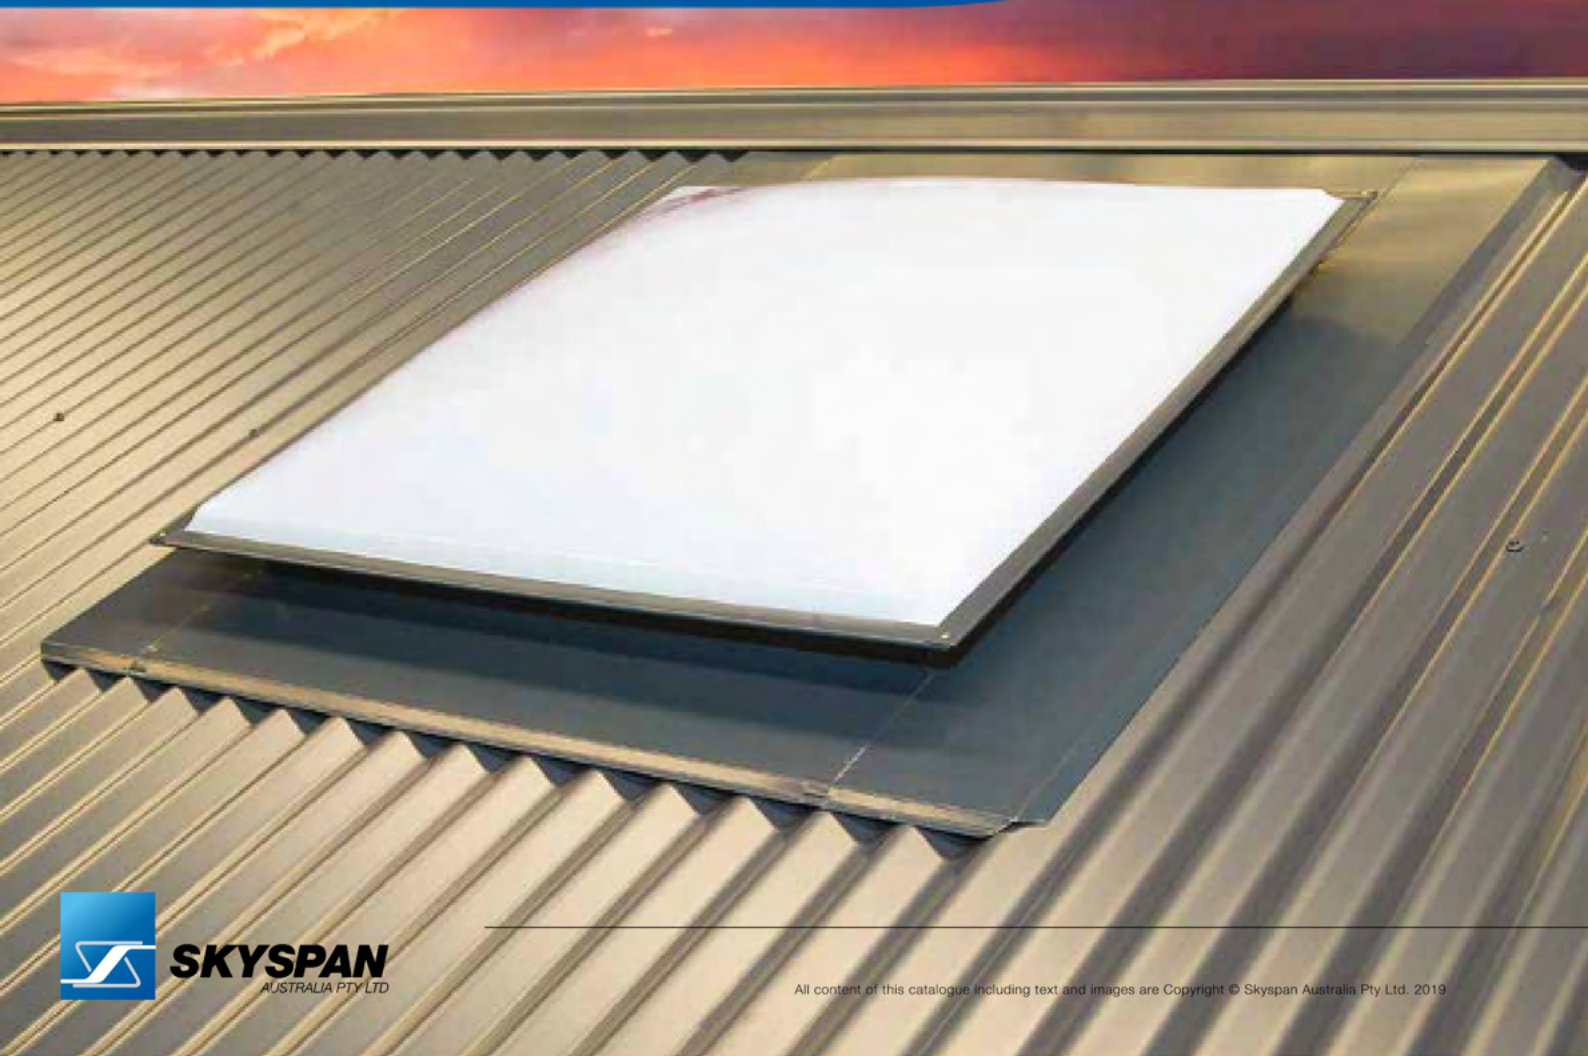





CORRIMATE™




CORRUGATED

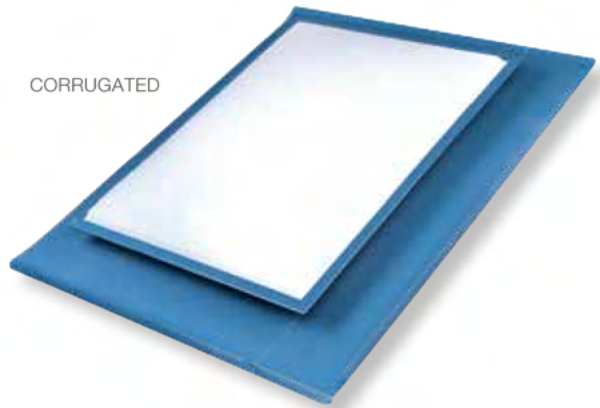

METALDECK

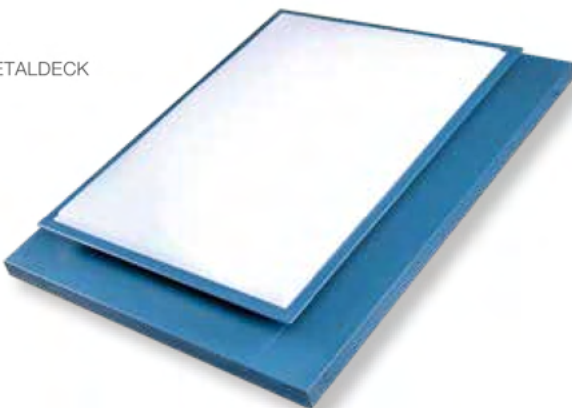

TILE

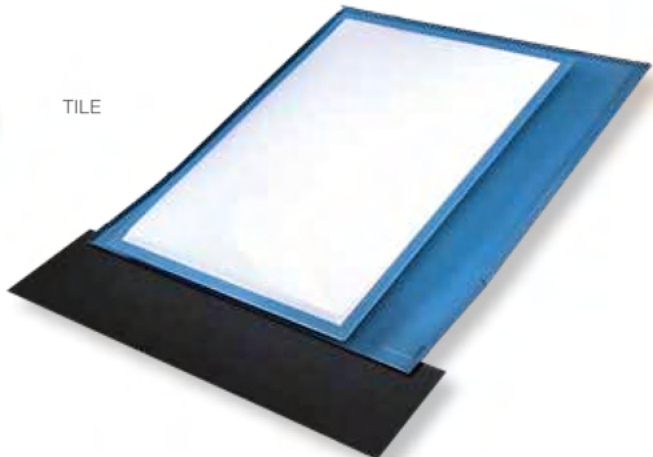



WHERE TO USE

Skyspan's Traditional skylight fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.

Ideal for:




VENTILATION TYPES

- Non Vented** The skylight has no ventilation system. This is the standard skylight and is used in most rooms.
- Passive Ventilation** The frame under the dome is perforated. This allows for hot air to naturally rise drawing steam and odours outside.
- Skylight Fan** An exhaust fan fixed inside the skylight mechanically draws up air, steam and odours before forcing them outside via the ventilation perforations in the skylight frame.


Non Vented



Passive Ventilation




Skylight Fan



TYPICAL INSTALLATION

Roof pitch range:  **0°-50°**

Traditional skylight shown installed with typical plasterboard light shaft.
(Flexible Shaft Kits available - see page 10)

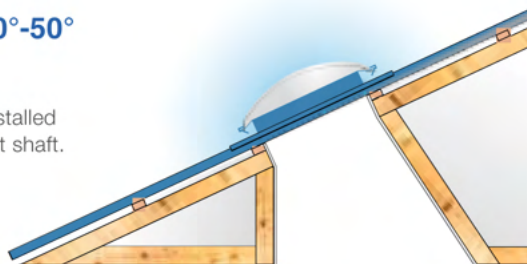

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/sunpipe-tubelight



MANUFACTURE

Flashing and Frame

STANDARD MATERIALS

0.75mm Zinalume®, steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Galvanised
- Aluminium
- Colorbond® Ultra
- Copper

CUSTOM FINISH

Powder coated to match Colorbond colour range.

Dome

STANDARD MATERIALS

Formed 3mm acrylic. 4.5mm for larger sizes.

STANDARD COLOUR

Opal
(White Translucent)

CUSTOM COLOUR OPTIONS

Grey Tint Clear



ENERGY RATING*

VLT 98% / SC .098 / SHGC .85 / U-Value 5.5



BAL RATING - LOW

Complies with Bushfire AS 3959-2009

* Energy rating figures refer to clear acrylic glazing only.

SIZING

Dimensions in millimeters.

Square	Rectangle
400 x 400	400 x 600
500 x 500	400 x 800
600 x 600	400 x 1100
650 x 650	500 x 700
800 x 800	500 x 1100
900 x 900	500 x 1400
1000 x 1000	600 x 900
1100 x 1100	600 x 1200
1200 x 1200	650 x 1100
1500 x 1500	800 x 1100
1800 x 1800	800 x 1400
2000 x 2000	900 x 1200
2200 x 2200	900 x 1500
2400 x 2400	1000 x 2200
	1600 x 2400
	1800 x 2600

Custom sizing up to 2400mm



Flexible Shaft Skylight Kit

The Skyspan Flexible Shaft Skylight Kit is a traditional Skylight that uses a flexible reflective shaft, ceiling trim and diffuser at the ceiling level in the place of an open plasterboard shaft.

The Flexible Shaft is made from highly reflective metalised tape to assist with the transfer of light and strengthened by a structural wire to hold the shaft in place for durability. The adaptable nature of the flexible shaft gives the ability to navigate around obstructing roof structures and services or resolve the complication of the ceiling penetration not directly aligning with the roof penetration.

- Cost effective option to plasterboard shaft
- Quicker to install
- Easier to install in difficult roof cavities



INCLUSIONS

- Flexible Shaft
- Collar
- Diffuser
- Ceiling Trim

VENTILATION TYPES



DIFFUSER TYPES

Prismat® The standard diffuser is a Clear Prismatic Diffuser that eliminates glare and produces an even spread of light by the female conical prism refracting properties.

WarmGlo® The option diffuser is available in both non-vented and vented models. WarmGlo Diffuser is a frosted white translucent diffuser that eliminates glare and produces a bright light that is softened for visual comfort.



Prismat



WarmGlo

WHERE TO USE

Suitable for any room where structurally compatible.



	ENERGY RATING*	VLT 98% / SC .098 / SHGC .85 / U-Value 5.5
	BAL RATING - LOW	Complies with Bushfire AS 3959-2009

* Energy rating figures refer to clear acrylic glazing only.

SIZING

Dimensions in millimeters.

Square	Rectangle
400 x 400	400 x 600
500 x 500	400 x 800
600 x 600	500 x 700
650 x 650	500 x 1100
800 x 800	600 x 1200
900 x 900	

Shaft Length
1000
2000
3000

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installationRoof pitch range:


TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES


Prices are available online at skyspan.com.au/skylight-flexible-shaft-kit

TYPICAL INSTALLATION

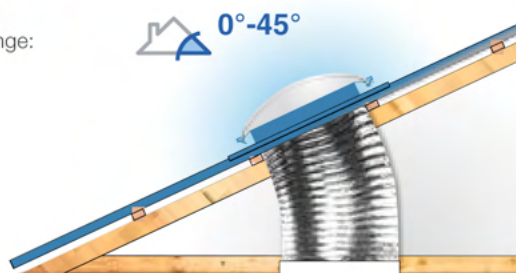




TFD Frame & Dome

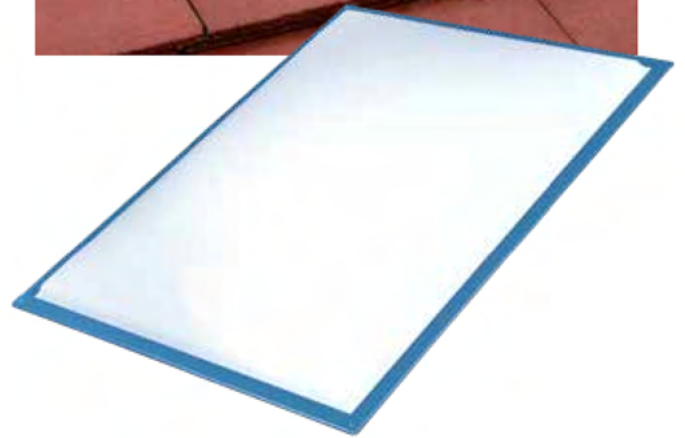

The Skyspan Frame & Dome (TFD) is the top part of the Skyspan Traditional Skylight without the flashing. TFD Skylights are used when the roof already has an existing fully flashed upstand, or the installer is providing their own flashing. They are supplied for replacement of not only existing Skyspan skylights, but also other manufacturers skylights.

Standard sizes will suit most existing skylights and can be custom made to fit any rectangular or square skylights. TFD include all the same specifications and features as the Skyspan Traditional Skylight as shown on pages 6/7.

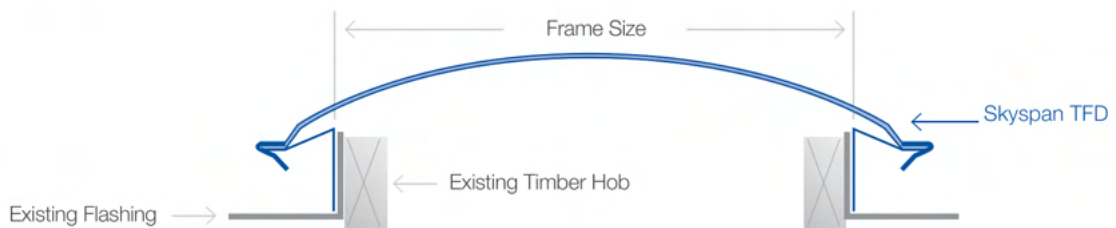

The Skyspan Frame & Dome is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.




EXISTING SKYLIGHT



TOP REPLACED WITH SFG

Skyspan SFG Frame & Glass

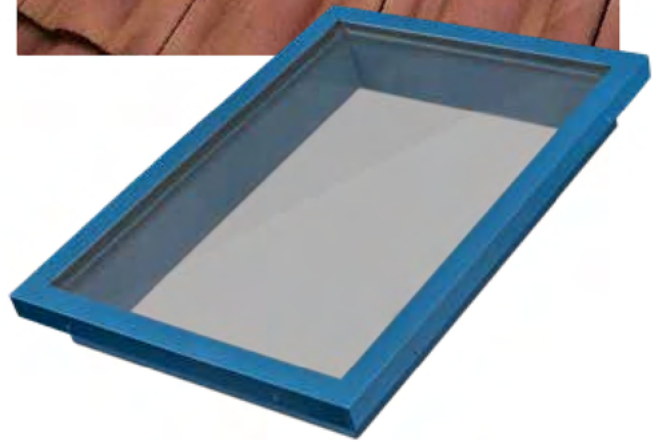

A high quality and versatile product that is just as suited in a new project as it is replacing an existing skylight. The Skyspan Frame & Glass (SFG) is supplied without flashings, allowing the installer to provide their own or use the existing flashing, when replacing the glass or dome of an existing skylight.

Standard sizes will suit most existing skylights. The SFG can also be custom made to fit any other size skylight, rectangular or square, whilst providing a clear view to the sky. The double glazing provides an excellent thermal barrier from the heat and cold. The Skyspan Frame & Glass is available with all the custom options as shown on the Skyspan GSL on pages 16/17.



The Skyspan Frame & Glass is manufactured to comply with the Australia Standard AS1288 and is covered by a seven (7) year guarantee.




GSL - Fixed Glass Skylight

FIXED


The Skyspan GSL is a Fixed Glass Skylight that combines room enhancing natural light with an externally stylish roof matching frame. The Clear Double Glazed Glass affords excellent thermal barriers to the heat in summer and the cold in winter while simultaneously providing a clear view to the daylight and night sky. As a made to order product, the standard sizes and features do not restrict the product make up as the Skyspan GSL can be custom made with options for alternative sizes and materials.




The Skyspan Fixed Skyspan GSL is manufactured to comply with the Australia Standard AS1288 and is covered by a seven (7) year guarantee.

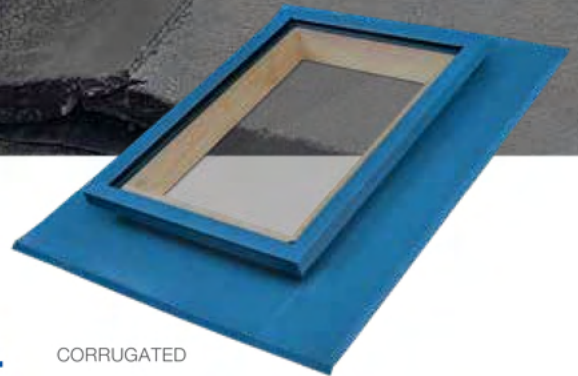

CORRUGATED

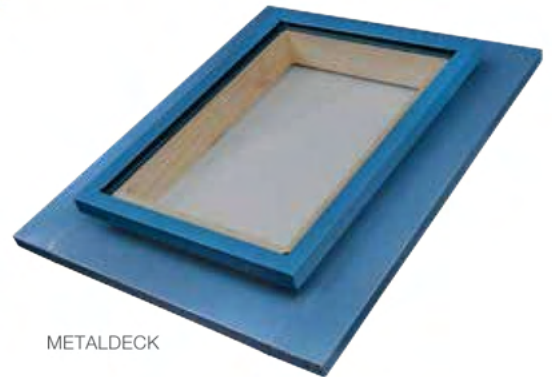

METALDECK

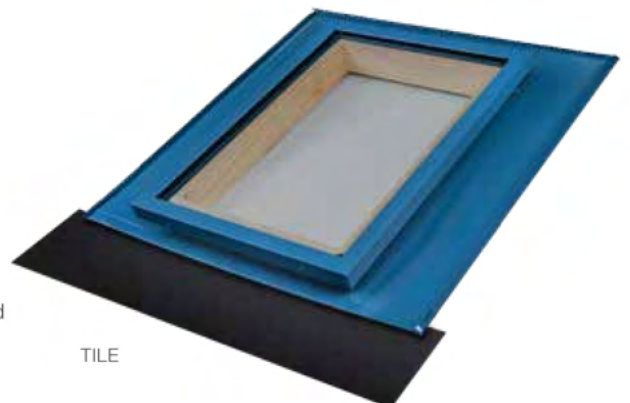

TILE

WHERE TO USE

Skyspan's Traditional skylight fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.

Ideal for:



SIZING

Dimensions in millimeters.

Square	Rectangle
400 x 400	400 x 600
500 x 500	400 x 800
600 x 600	400 x 1100
650 x 650	500 x 700
800 x 800	500 x 1100
900 x 900	500 x 1400
1000 x 1000	600 x 900
1100 x 1100	600 x 1200
1200 x 1200	650 x 1100
	800 x 1100
	800 x 1400

MANUFACTURE

Flashing and Frame

STANDARD MATERIALS

Aluminum frame welded for superior strength. 0.75mm Zincalume® flashing.

CUSTOM MATERIAL OPTIONS

Stainless Steel Aluminum Copper Galvanised Colorbond® Ultra

STANDARD FINISH

Mill

CUSTOM FINISH

Powder coated to match Colorbond colour range.

Glazing (Complies with AS1288)

STANDARD GLAZING

Clear

CUSTOM GLAZING OPTIONS

Neutral Grey Tint White Blue Translucent

GLAZING

Grade A Laminated safety glass must be used for skylights and overhead glazing installed 3m or more above the finished floor level. (AS1288)

Performance Laminated Glazing (Standard)

Laminate glass resists impact protection.

PVB interlayer eliminates 99% of UV.




Comfort Double Glazing (Optional)

Argon filled cavity increases energy efficiency.

Low-E coating maximises light transmittance & reduces solar heat gain.

Laminated inner glass resists impact protection. PVB interlayer eliminates 99% of UV.



ENERGY RATING	U-VALUE		SHGC
	Clear	SHGC	
	1.6	0.61	
	2.5	0.55	
	1.6	0.45	
	1.7	0.33	
	1.9	0.28	

BAL RATING - 29: Complies with Bushfire AS 3959-2009**

**Ember Guard is required for roof pitches below 18°.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings


PRICES

Prices are available online at skyspan.com.au/gsl-glass-skylight

TYPICAL INSTALLATION

Roof pitch range: 0°-45°

Traditional skylight shown installed with typical plasterboard light shaft.

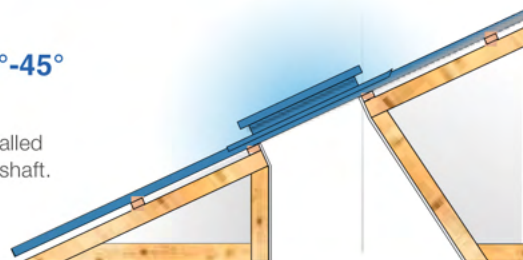



GSW - Opening Glass Skylight

OPENING

The Skyspan GSW is a Manual Opening Glass Skylight that combines room enhancing natural light and ventilation with an externally stylish roof matching frame. Opening with a handle or extension pole allows ventilation to be controlled when needed. The Clear Double Glazed Glass affords excellent thermal barriers to the heat in summer and the cold in winter while simultaneously providing a clear view to the daylight and night sky. As a made to order product, the standard sizes and features do not restrict the product make up as the Skyspan GSL can be custom made with options for alternative sizes and materials.




The Skyspan Opening GSL is manufactured to comply with the Australia Standard AS1288 and is covered by a seven (7) year guarantee.



CORRUGATED



METALDECK

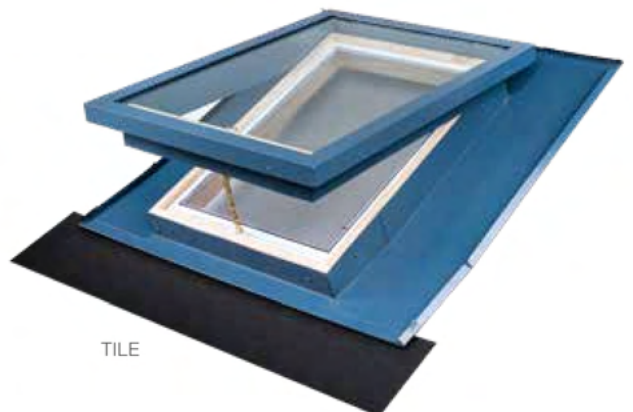

TILE

WHERE TO USE

Skyspan's Traditional skylight fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.

Ideal for:



SIZING

Dimensions in millimeters.

Square	Rectangle
400 x 400	400 x 600
500 x 500	400 x 800
600 x 600	400 x 1100
650 x 650	500 x 700
800 x 800	500 x 1100
900 x 900	500 x 1400
1000 x 1000	600 x 900
1100 x 1100	600 x 1200
1200 x 1200	650 x 1100
	800 x 1100
	800 x 1400



INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/gsw-glass-skylight

MANUFACTURE

Flashing and Frame

STANDARD MATERIALS

Aluminum frame welded for superior strength. 0.75mm Zinalume® flashing.

CUSTOM MATERIAL OPTIONS

Stainless Steel Copper Galvanised Colorbond® Ultra

STANDARD FINISH

Mill

CUSTOM FINISH

Powder coated to match Colorbond® colour range.

Glazing (Complies with AS1288)

STANDARD GLAZING

Neutral

CUSTOM GLAZING OPTIONS

Clear Grey Tint White Translucent Blue

GLAZING

Grade A Laminated safety glass must be used for skylights and overhead glazing installed 3m or more above the finished floor level. (AS1288)

Performance Laminated Glazing (Standard)

Laminate glass resists impact protection.

PVB interlayer eliminates 99% of UV.




Comfort Double Glazing (Optional)

Argon filled cavity increases energy efficiency.

Low-E coating maximises light transmittance & reduces solar heat gain.

Laminated inner glass resists impact protection. PVB interlayer eliminates 99% of UV.



ENERGY RATING		U-VALUE	SHGC
		Clear	1.6
	White Translucent	2.5	0.55
	Neutral Tint	1.6	0.45
	Grey Tint	1.7	0.33
	Premium Glass	1.9	0.28

BAL RATING - 29 Complies with Bushfire AS 3959-2009**

**Ember Guard is required for roof pitches below 18°.

HANDLE


Supplied with easy wind handle. Optional telescopic rod control for out-of-reach situations. 1750 - 3000mm



TYPICAL INSTALLATION

Roof pitch range: 0°-45°

Traditional skylight shown installed with typical plasterboard light shaft.

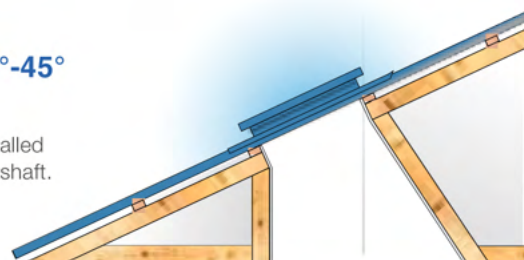

Velux Skylights



Not only a preferred supplier of Velux skylights, Skyspan is also a manufacturer of quality custom flashings to suit the Velux range of products as shown on the following pages. Designed to fit to all Australian roof types, Skyspan flashings are manufactured from 0.75mm Zinalume steel and powdercoated to match the Colorbond range.

Bringing light to life



VSS Solar Powered



VSE Electric Opening



FCM Fixed (Non-Opening)



VS Manual Opening



FS Fixed (Non-Opening)



GPL Duel Action Roof Window



VCS Solar Powered



VCM Manual Operated



GGL Centre Pivot Roof Window



TWF Sun Tunnel Flexible




TWR Sun Tunnel Rigid



Velux Pitched Roof Skylight Flashing

FOR ROOF PITCH - BELOW 15°

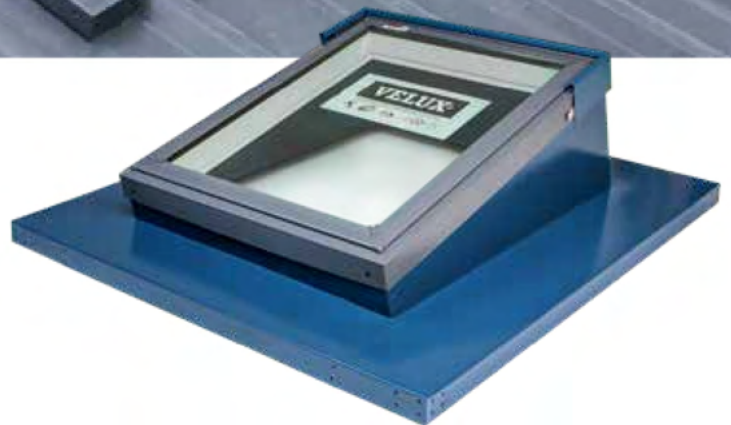

Pitch Adaptor Custom Skylight Flashings are used to install Velux Pitch Skylights when the roof pitch is below 15°. Velux Pitch Roof Skylights are designed to be installed at a roof pitch greater than 15°, if they are installed below 15° the Velux Skylights will leak and the warranty voided. Pitch Adaptor Custom Flashing raise the Skylight to or above the minimum pitch specified by Velux.

- Cost effective option to plasterboard shaft
- Quicker to install
- Easier to install in difficult roof cavities



The Skyspan Velux Skylight Flashing is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.

VELUX MODELS COMPATIBLE



FS
Fixed Non-Opening



VS
Manual Opening



VSE
Electric Opening




VSS
Solar Opening



METALDECK



CORRUGATED

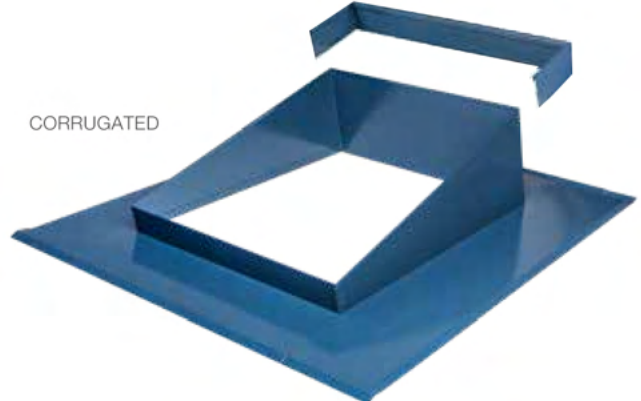

ROOF PITCH

- Roof pitch range: **0°-8°** Use the V15 Flashing that is pitched at 15°
9°-14° Use the V7 Flashing that is pitched at 7°

(If the Skylight is pitched higher than 15° when the roof pitch is added to the Flashing the Skylight still meets all the requirements.)

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zincolume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings




Velux Pitched Roof Skylight Flashing

FOR ROOF PITCH - ABOVE 15°





Custom Skylight Flashings are used to install Velux Pitch Skylights when the roof pitch is above 15°. The standard Velux Flashing is designed only to suit a Tile Roof. Skyspan Custom Skylight Flashings are used to install Velux Pitched Skylights onto Corrugated and Metaldeck Roofs. The Flashings are spot welded together in one piece saving the time of building a flashing and can be powdercoated to match Colorbond Roofing colours reducing the colour contrast on the roof.

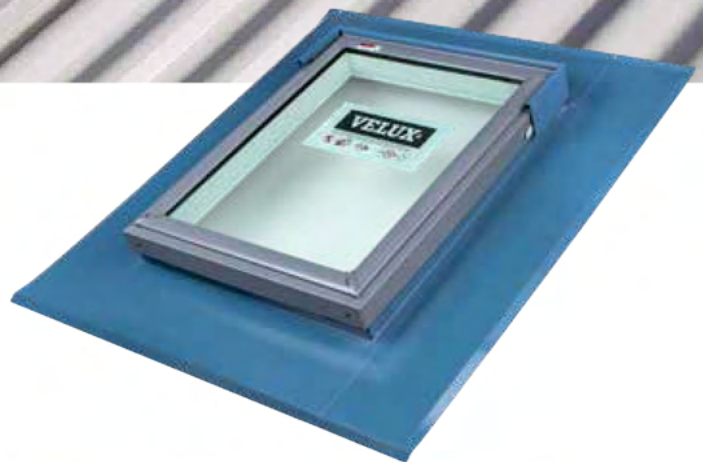

The Skyspan Velux Skylight Flashing is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.




VELUX MODELS COMPATIBLE


-  **FS**
Fixed Non-Opening
-  **VS**
Manual Opening
-  **VSE**
Electric Opening
-  **VSS**
Solar Opening




METALDECK

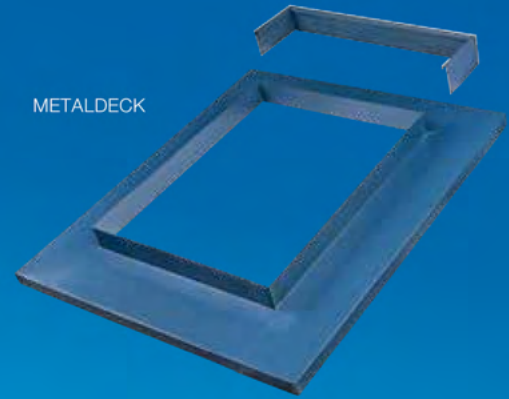

CORRUGATED

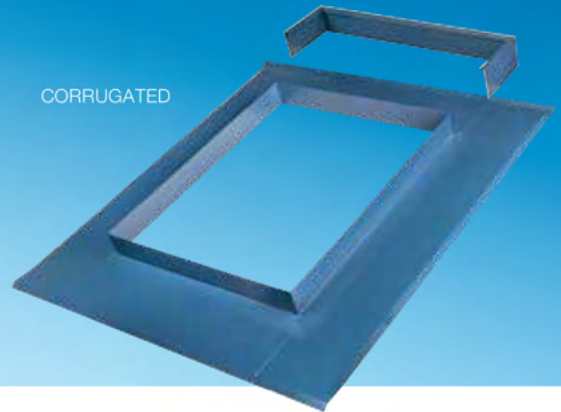

TILE

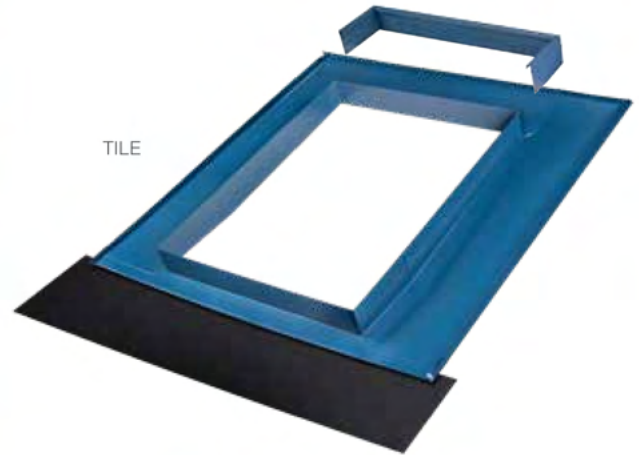

ROOF PITCH

Roof pitch range:  **15°-90°**

MANUFACTURE

Flashing and Lid






STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

 Mill

CUSTOM MATERIAL OPTIONS

 Stainless Steel  Aluminium  Copper
 Galvanised  Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings



VELUX®

Velux Flat Roof Skylight Flashing




PITCH ADAPTOR FOR ROOF PITCH - BELOW 5°

VELUX MODELS COMPATIBLE

Custom Skylight Flashings are used to install Velux Flat Roof Skylights when the roof pitch is below 5°. Velux Flat Roof Skylights won't leak below 5°, however Velux recommends they are pitched with a slight pitch to prevent condensation build up and water ponding. Velux Flat Roof Skylights do not come with any flashings so a custom flashing is needed so it can be installed. Skyspan Custom Skylight Flashings are used to install Velux Flat Roof Skylights onto Tile, Corrugated, Metaldeck and Concrete Roofs. Included with the Flashing is a Timber hob for the FCM to be mounted to and the plasterboard shaft to be fixed to.



FCM
Fixed Non-Opening




VCM
Manual Opening



VCS
Solar Opening

7 YEAR
WARRANTY

The Skyspan Velux Skylight Flashing is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.

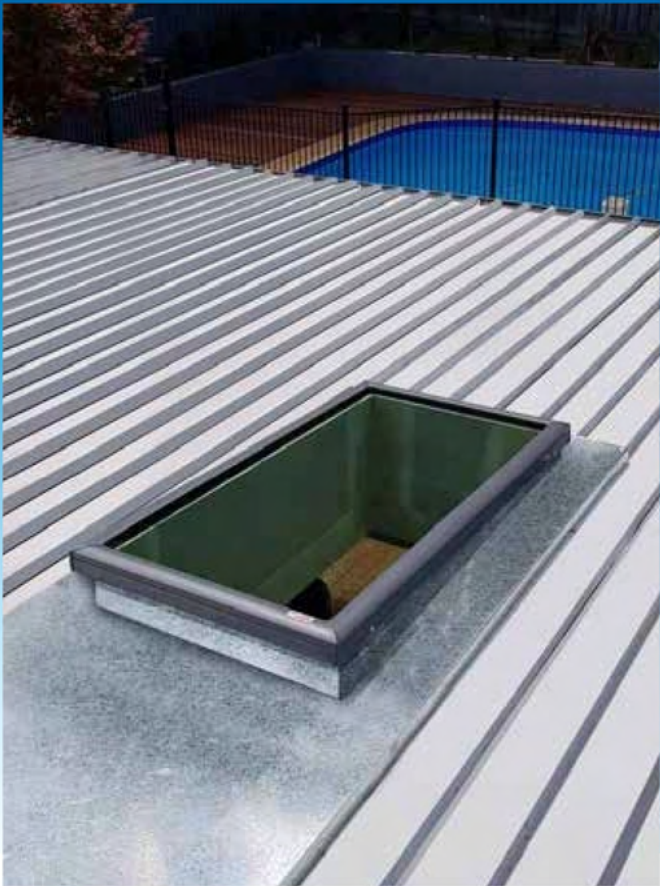

METALDECK



ROOF PITCH

Roof pitch range:



MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zincalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION


Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings

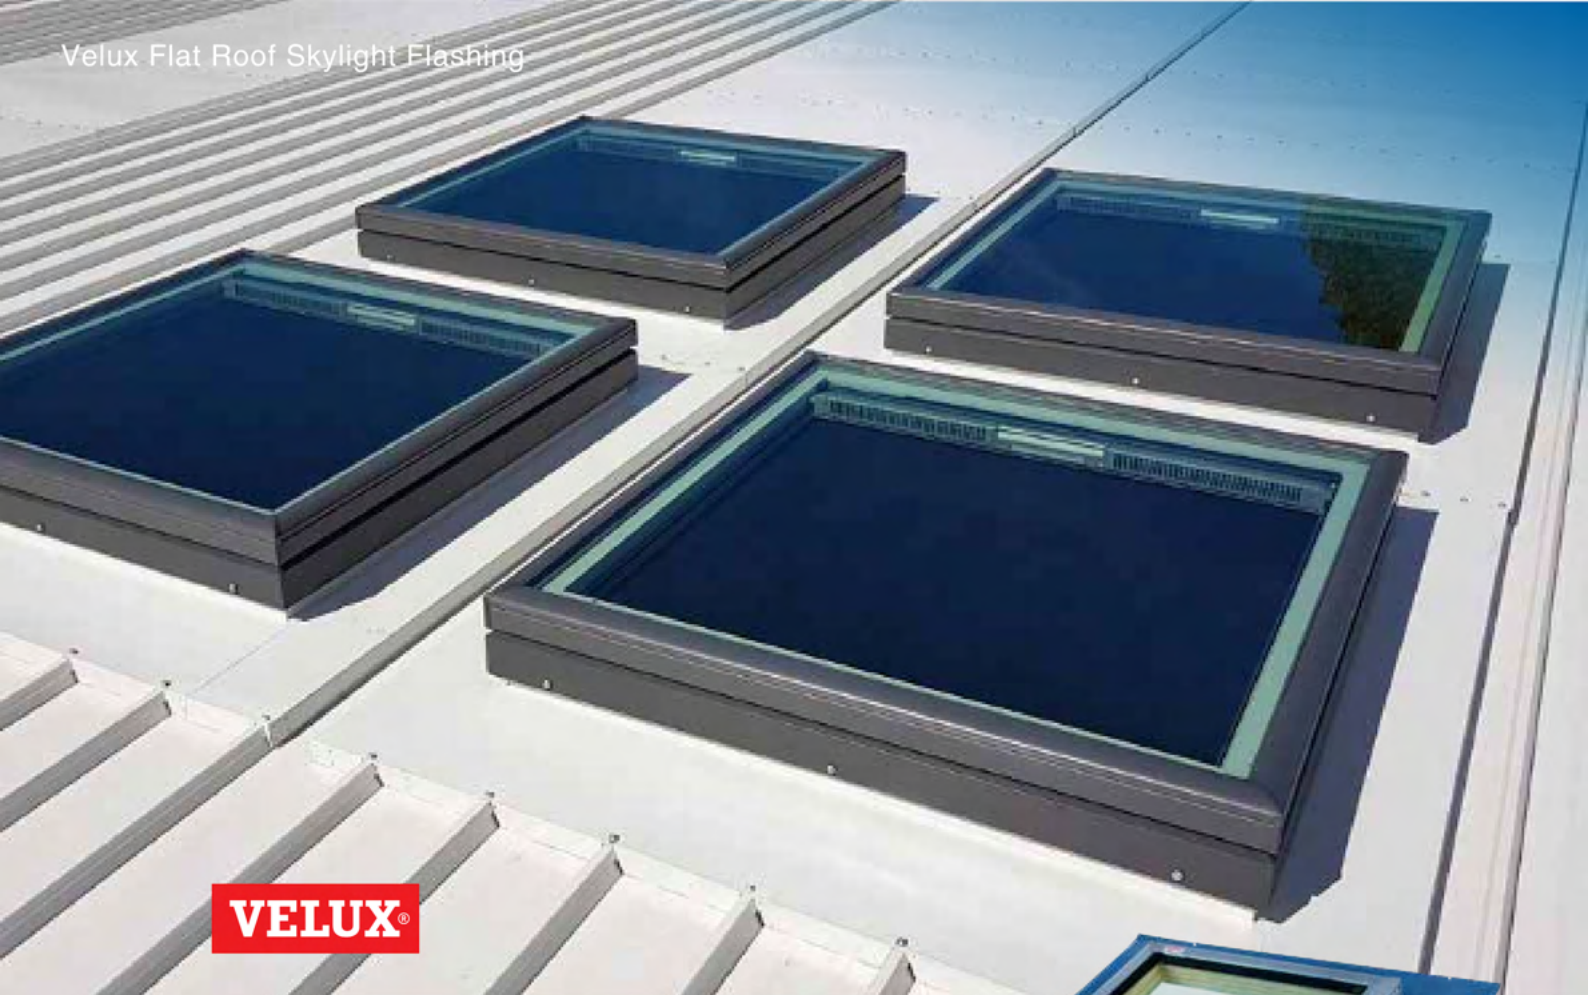


Velux Flat Roof Skylight Flashing

FOR ROOF PITCH - ABOVE 5°

Custom Skylight Flashings are used to install Velux Flat Roof Skylights when the roof pitch is above 5°. Velux Flat Roof Skylights do not come with any flashings so a custom flashing is needed so it can be installed. Skyspan Custom Skylight Flashings are used to install Velux Pitched Skylights onto Tile, Corrugated, Metaldeck and Concrete Roofs. Included with the Flashing is a Timber hob for the FCM to be mounted to and the plasterboard shaft to be fixed to. The Flashings are spot welded together in one piece saving the time of building a flashing and can be Powdercoated to match Colorbond Roofing colours reducing the colour contrast on the roof.



The Skyspan Velux Skylight Flashing is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.

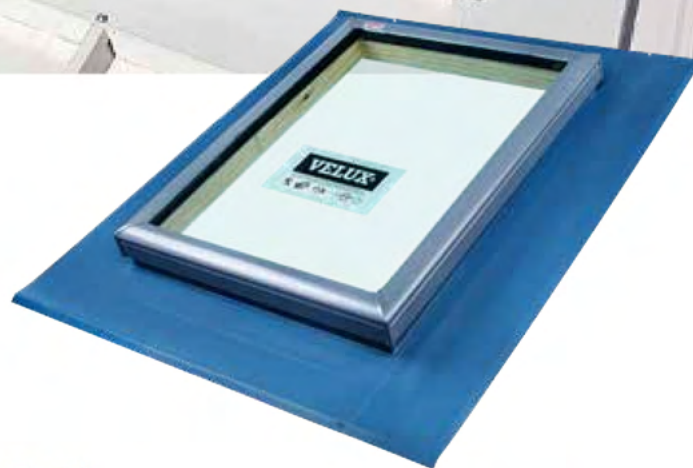

VELUX MODELS COMPATIBLE




FCM
Fixed Non-Opening




VCM
Manual Opening




VCS
Solar Opening

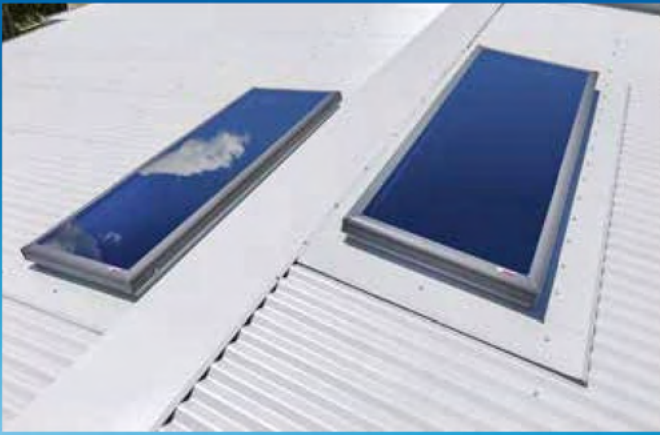


METALDECK

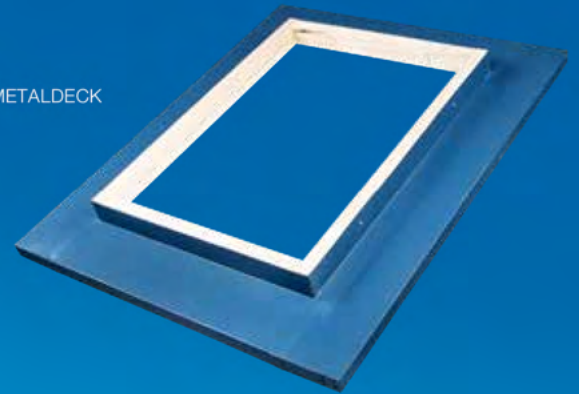

CORRUGATED

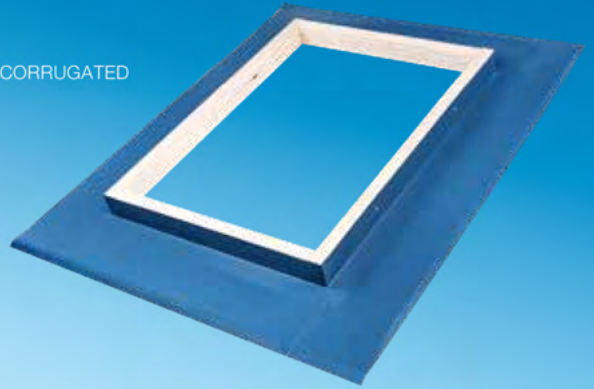

TILE

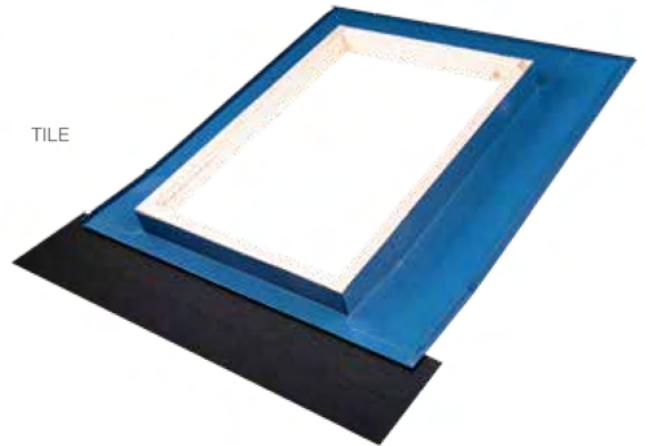

ROOF PITCH

Roof pitch range:



SIZES

All Velux Pitch Skylight sizes.

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zincalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

CUSTOM FINISH

Powder coated to match Colorbond colour range.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings



Velux Roof Window Flashing

FOR ROOF PITCH - ABOVE 15°



CORRUGATED

VELUX MODELS COMPATIBLE

Custom Roof Window Flashings are used to install Velux Roof Windows when the roof pitch is above 15°. The standard Velux Flashing is designed only to suit a Tile Roof. Skyspan Custom Roof Window Flashings are used to install Roof Windows onto Corrugated and Metaldeck Roofs. The Flashings are spot welded together in one piece saving the time of building a flashing and can be powdercoated to match Colorbond Roofing colours reducing the colour contrast on the roof.




GGL
Centre Pivot




GPL
Dual Action



The Skyspan Velux Skylight Flashing is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.

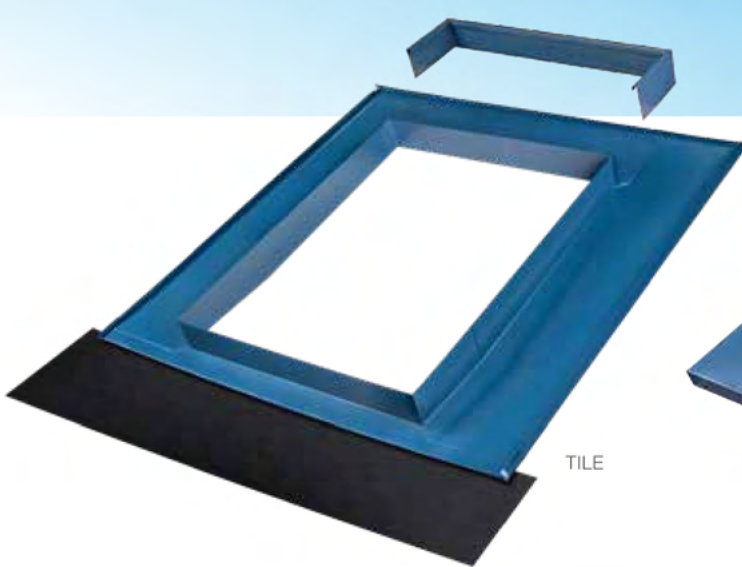

TILE

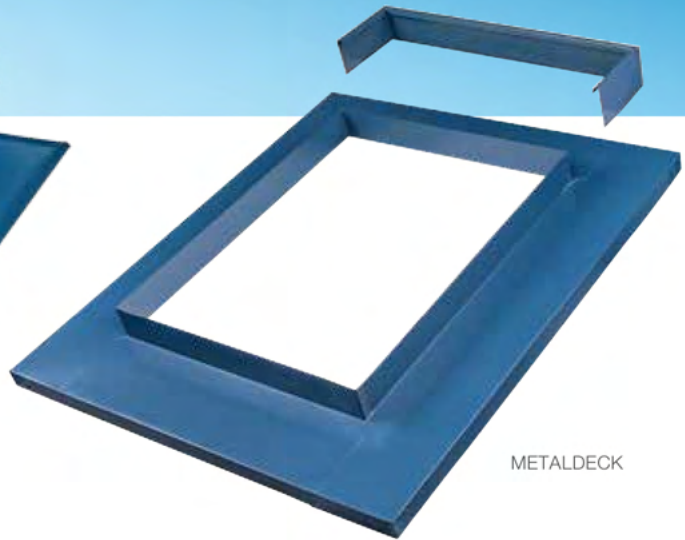

METALDECK

ROOF PITCH

Roof pitch range:



15°-90°

SIZES

All Velux Pitch Skylight sizes.

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zincolume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

Stainless Steel
 Aluminium
 Copper
 Galvanised
 Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings



TGFC Skylights

Trafficable Floors

The Skyspan Pyramid Skylight is a light weight durable product that has visual appeal with the pyramid shaped glazing. Due to the pitch and shape of the glazing, the Pyramid Skylight is largely self-cleaning and this makes it ideal for situations with low roof pitch. Pyramid Skylights are commonly used on larger buildings such as shopping centres, hospitals and hotels.



OPAL



CLEAR



GREY TINT



The Skyspan Pyramid Skylight is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.

WHERE TO USE

Skyspan's Pyramid Skylights fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.

Ideal for:



SHOPPING CENTRES



HOSPITALS



HOTELS



HOMES

VENTILATION TYPES

Non Vented

The Skylight has no ventilation system. This is the standard Skylight and is used in most rooms.

Passive Ventilation

The frame under the dome is perforated, this allows for hot air to naturally rise, taking with it steam and odors are drawn outside.



SIZING

Dimensions in millimeters.

Square
600 x 600
800 x 800
900 x 900
1000 x 1000
1100 x 1100
1200 x 1200
1500 x 1500
1800 x 1800
2000 x 2000
2200 x 2200
2400 x 2400

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

STANDARD FINISH

- Mill

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

Dome

STANDARD MATERIALS

Formed 3mm acrylic. 4.5mm for larger sizes.

STANDARD COLOUR

- Opal
(White Translucent)

CUSTOM COLOUR OPTIONS

- Grey Tint
- Clear

	ENERGY RATING*	VLT 98% / SC .098 / SHGC .85 / U-Value 5.5
	BAL RATING - LOW	Complies with Bushfire AS 3959-2009

* Energy rating figures refer to clear acrylic glazing only.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/pyramid-skylights

TYPICAL INSTALLATION

Roof pitch range: **0°-45°**

Pyramid Skylight shown installed with typical plasterboard light shaft.







Circular Skylights

POLYMER

The Skyspan Circular Skylight is a light weight durable product that has visual appeal with the Circular shaped glazing. Circular Skylights are mounted on a square hob and transmit light to the room below via a circular plasterboard shaft that is constructed by others. Due to the pitch and shape of the glazing, the Circular Skylight is largely self-cleaning and this makes it ideal for situations with low roof pitch.



The Skyspan Circular Skylight is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.

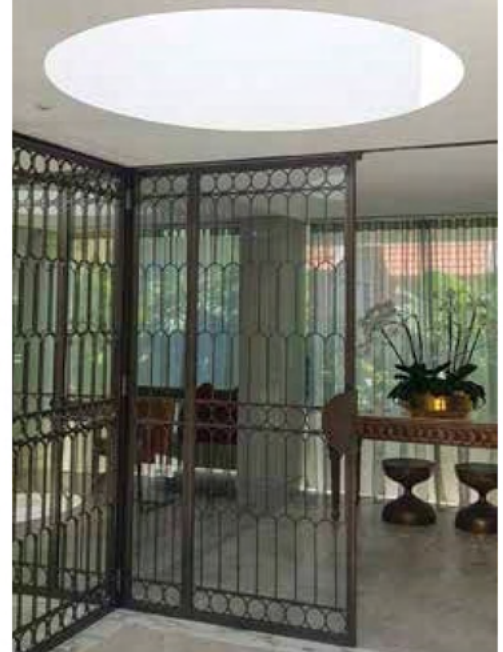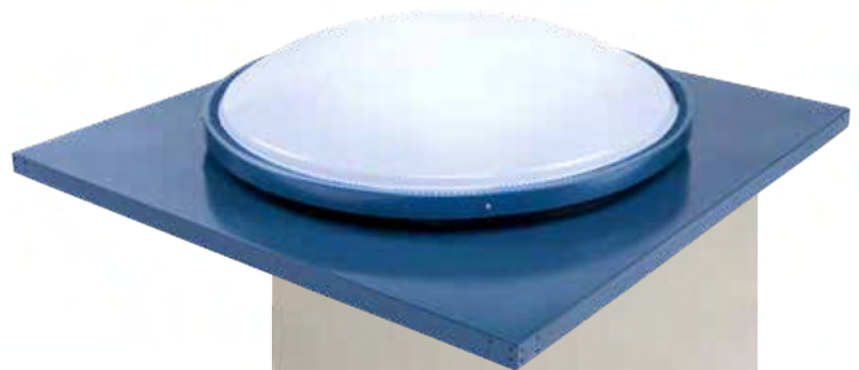

WHERE TO USE

Skyspan's Circular Skylight fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.


Ideal for:



VENTILATION TYPES

Non Vented The Skylight has no ventilation system. This is the standard Skylight and is used in most rooms.

Passive Ventilation The frame under the dome is perforated, this allows for hot air to naturally rise, taking with it steam and odors are drawn outside.

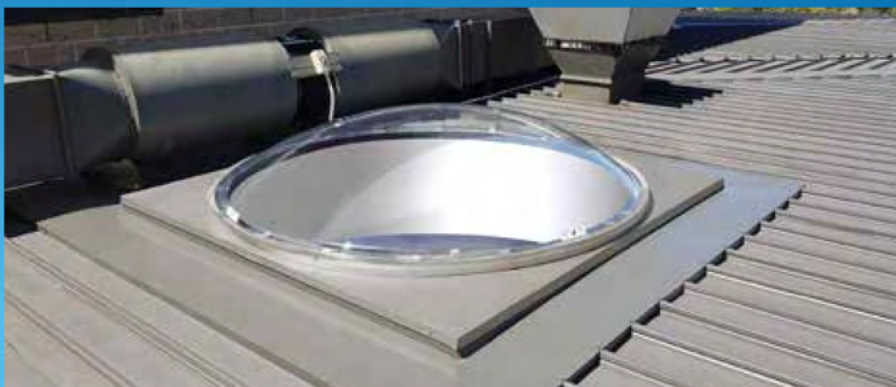

SIZING

Dimensions in millimeters.

Diameter
600
800
900
1000
1100
1200
1500
1800
2000
2200
2400

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zincalume® steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

Stainless Steel Aluminium Copper Galvanised Colorbond® Ultra

STANDARD FINISH

Mill

CUSTOM FINISH

Powder coated to match Colorbond colour range.

Dome

STANDARD MATERIALS

Formed 3mm acrylic. 4.5mm for larger sizes.

STANDARD COLOUR

Opal (White Translucent)

CUSTOM COLOUR OPTIONS

Grey Tint Clear

ENERGY RATING*	VLT 98% / SC .098 / SHGC .85 / U-Value 5.5
BAL RATING - LOW	Complies with Bushfire AS 3959-2009

* Energy rating figures refer to clear acrylic glazing only.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/skyspan-circular-skylight

TYPICAL INSTALLATION

Roof pitch range: 0°-45°

Circular Skylight shown installed with typical plasterboard light shaft.



Domelinks®

Skyspan modular link roof lighting system provides natural lighting by a simple and most economical method to large areas. Commercial and industrial buildings benefit with abundant non-glare lighting whenever required. The Skyspan Domelink® system provides an aesthetic finish to any commercial roof, and provides natural light and ventilation away from the external walls.



The Skyspan Domelink® Skylight is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.



MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

Stainless Steel Aluminium Copper
 Galvanised Colorbond® Ultra

CUSTOM FINISH

Powder coated to match Colorbond® colour range.

Dome

STANDARD MATERIALS

Formed 3mm acrylic.
4.5mm for larger sizes.

STANDARD COLOUR

Opal
(White Translucent)

CUSTOM COLOUR OPTIONS

Grey Tint Clear



ENERGY RATING*

VLT 98% / SC .098 / SHGC .85 / U-Value 5.5



BAL RATING - LOW

Complies with Bushfire AS 3959-2009

* Energy rating figures refer to clear acrylic glazing only.

WHERE TO USE

Skyspan's Roof Access Hatch fits all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Commonly used in Industrial buildings and high rise for maintenance to rooftop plant equipment. Can also be used on residential homes.

Ideal for:



FACTORIES



SHOPPING CENTRES



HOSPITALS



HOTELS

TYPICAL INSTALLATION

Roof pitch range:  0°-60°

SIZING

Dimensions in millimeters.

- SDL400 Nominal size 400x1350mm
- SDL500 Nominal size 500x1350mm
- SDL800 Nominal size 800x1350mm
- SDL1000 Nominal size 1000x1350mm

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS


Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Request a quote online at skyspan.com.au

Roof Access Hatches

The Skyspan Roof Access Hatch systems are sturdy built for commercial and domestic applications. Made from Zincalume steel with secure lockable latches, the access hatchway creates safe and easy access to the roof space and protects from intruders, noise and the unwanted elements of nature. Available in 3 models, the Skyspan Roof Access Hatch system is available in all Colorbond roof colours and can fit all common Australian roof types.

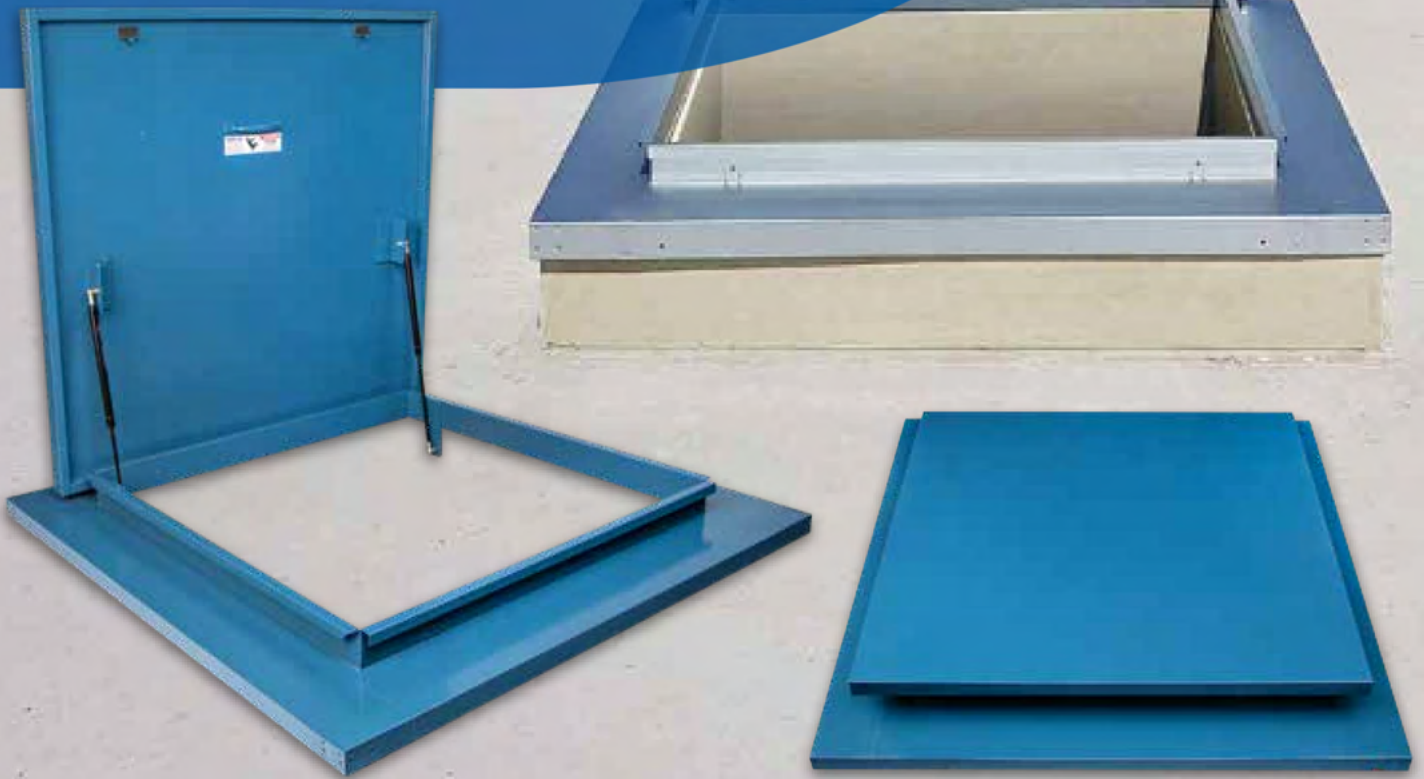

7 YEAR
WARRANTY

The Skyspan Hatch is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.

MH

SINGLE SKIN HATCH

Ideal for both commercial and domestic applications, the Skyspan MH is a sturdy built access hatchway for safe access/ egress to the roof space for numerous applications.

SIZING

500 x 700
500 x 1100
600 x 600
600 x 900
600 x 1200
800 x 800
800 x 1100
900 x 900
900 x 1200
1000 x 1000

- Single skin Zincalume steel lid
- Concealed gas struts
- 2 x lockable latches
- Flashing to suit all Australian roof types included
- 0.75mm Australian zincalume steel for durability
- Leakproof flashing spot welded for strength
- Powdercoated to match all Colorbond roof colours

MHD

DOUBLE SKIN HATCH

Designed to insulate from the outside temperature and reduce noise penetration. The lid has a double zincalume steel skin for extra rigidity which incorporates an inner core of insulation foam.

SIZING

500 x 700
500 x 1100
600 x 600
600 x 900
600 x 1200
800 x 800
800 x 1100
900 x 900
900 x 1200
1000 x 1000

- Extra rigid double skin steel Zincalume lid with foam core
- Strengthened aluminium gas strut supports
- Concealed heavy duty gas struts
- 2 x lockable latches
- Flashing to suit all Australian roof types included
- 0.75mm Australian zincalume steel for durability
- Leakproof flashing spot welded for strength
- Powdercoated to match all Colorbond roof colours

MHH

HEAVY DUTY HATCH

As the premium Skyspan hatch, the MHH is a heavy duty construction designed for larger openings. To insulate from the outside temps and reduce noise penetration, the MHH incorporates the same insulated double skin lid as the MHD and a reinforced double skin frame for extra strength. It also includes heavy duty gas struts and reinforced strut support brackets.

SIZING

900 x 900
900 x 1200
1000 x 1000
1000 x 1300
1000 x 1500
1100 x 1100
1500 x 1500



- Reinforced heavy duty double skin Zincalume frame
- Extra rigid double skin steel Zincalume lid with foam core
- Reinforced aluminium gas strut support brackets
- Concealed heavy duty gas struts
- 2 x lockable latches
- Flashing to suit all Australian roof types included
- 0.75mm Australian zincalume steel for durability
- Leakproof flashing spot welded for strength
- Powdercoated to match all Colorbond roof colours



CORRUGATED



METALDECK

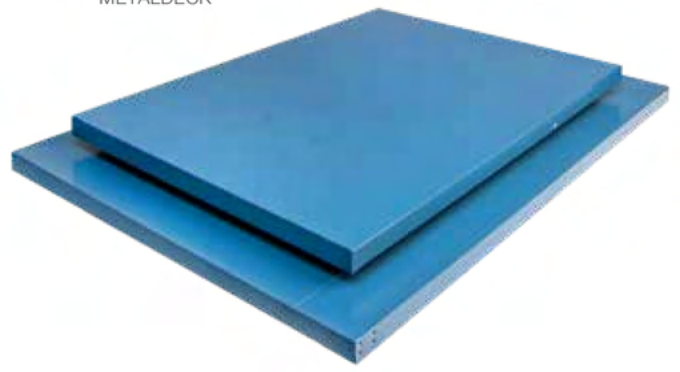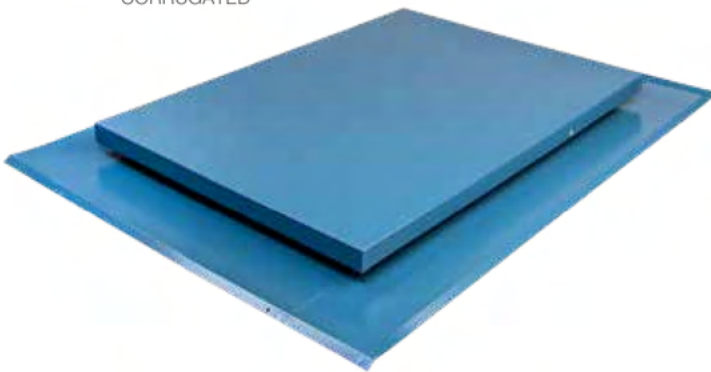

Roof Access Hatches

WHERE TO USE

Skyspan's Roof Access Hatch fits all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Commonly used in Industrial buildings and high rise for maintenance to rooftop plant equipment. Can also be used on residential homes.

Ideal for:



Roof pitch range:



MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

Stainless Steel Aluminium Copper
Galvanised Colorbond® Ultra

CUSTOM FINISH

Powder coated to match Colorbond colour range.

LOCKS

The Access Hatch comes standard with two internal lockable latches that can be padlocked. An pad bolt lock is available as an option.

HINGING

Hatches can be hinged on either short or long sides. Short side is the standard hinge fixing.

FIRE RATING

Roof access is manufactured from non-combustible materials and creates a non-combustible lining to the roof.

INSTALLATION


Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS



Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/metal-roof-access-hatch

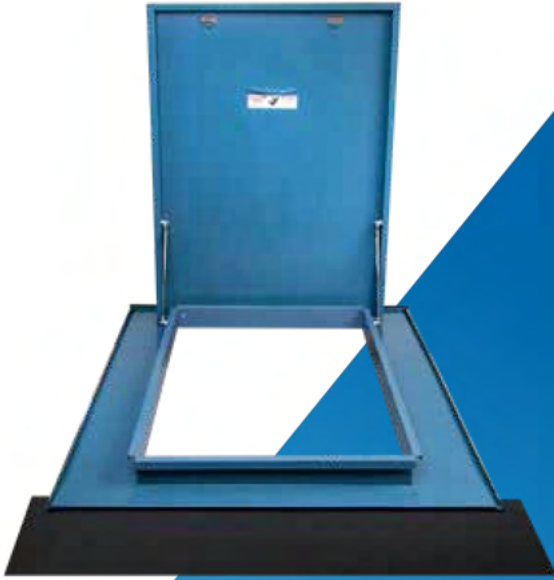

TILE

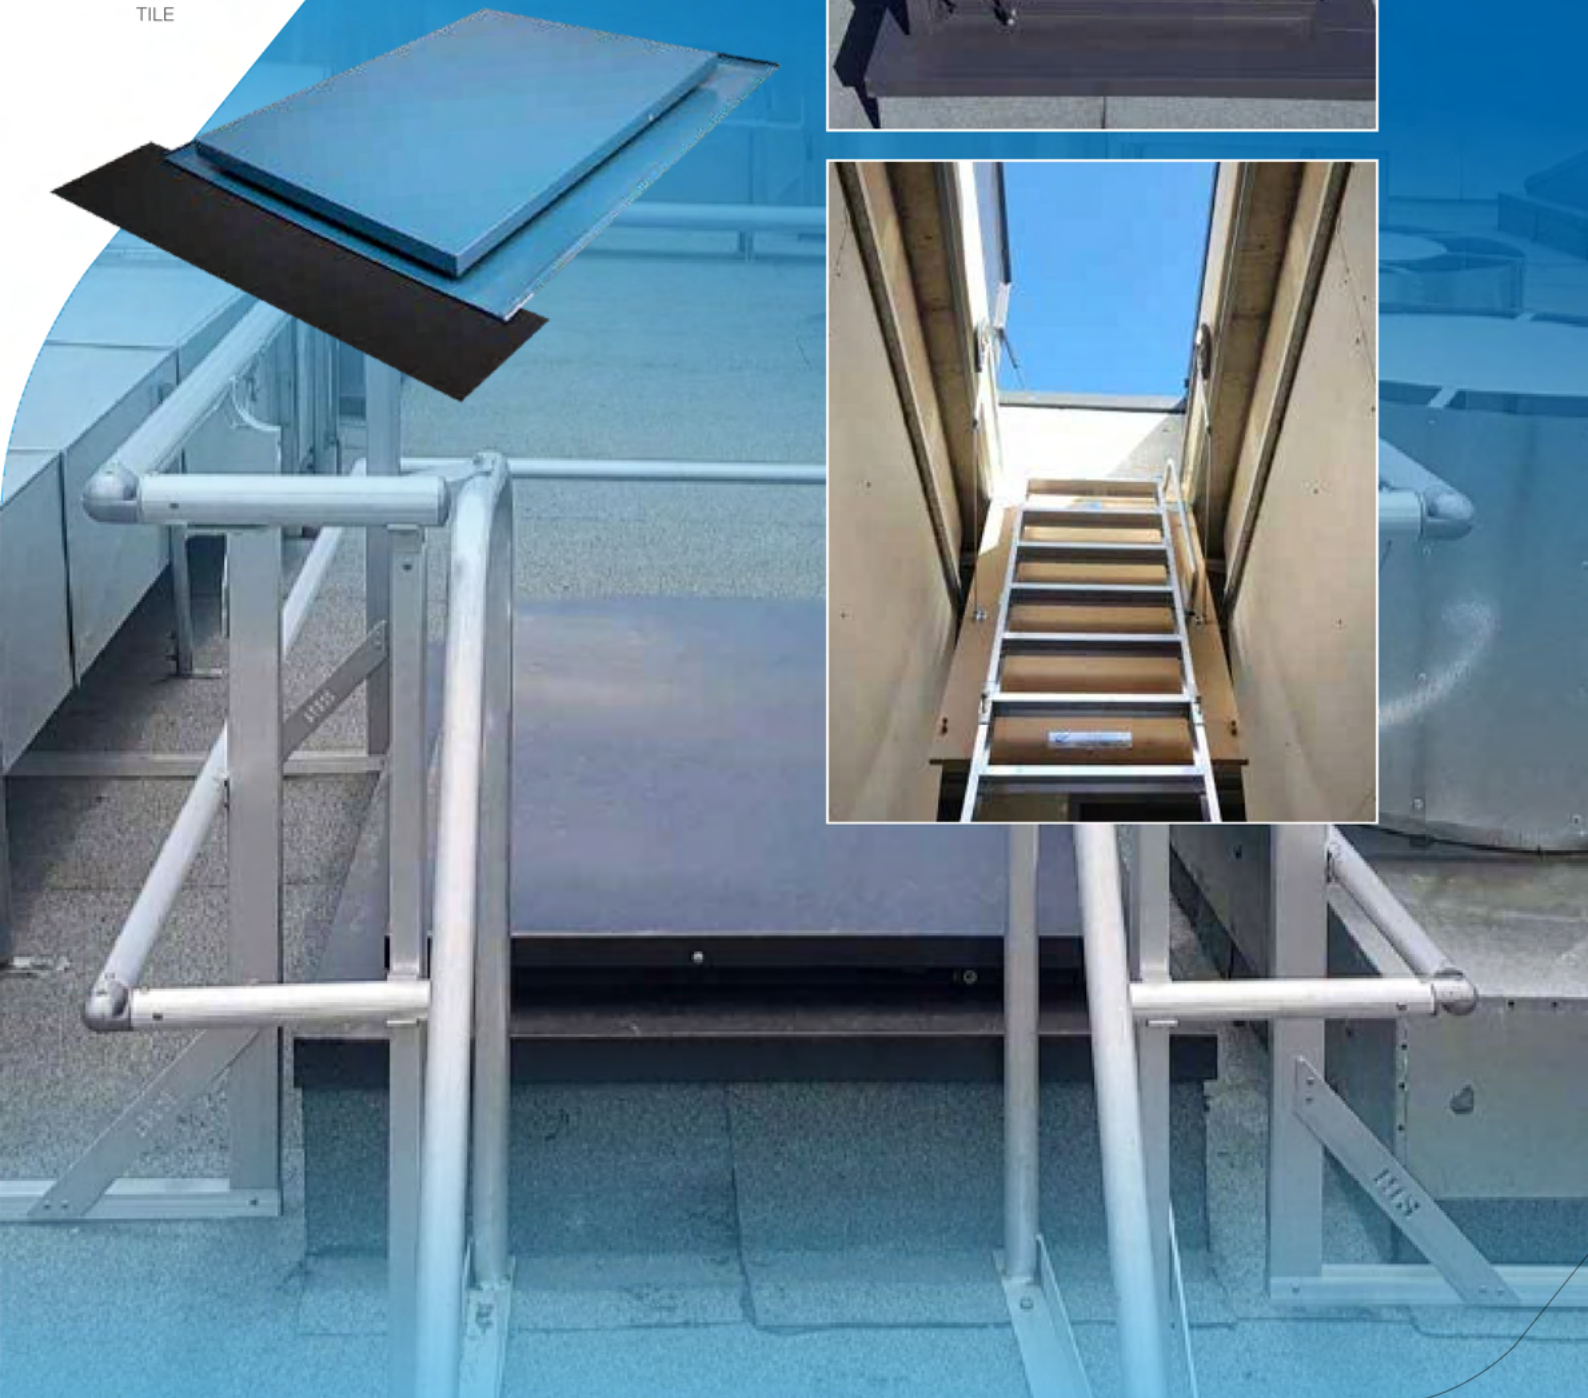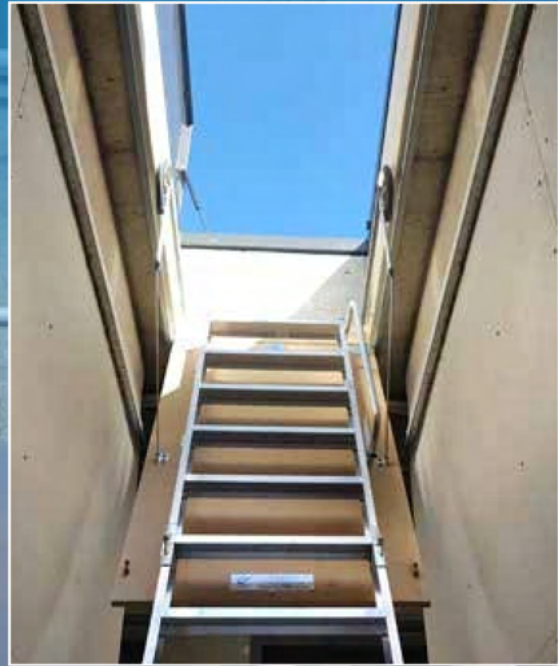

Cyclone Hatch



Designed for Cyclones that effect the northern parts of Australia, it is manufactured to the highest standards to withstand the toughest environments.

- Designed for Cyclone Rated Wind Region C as per Australian Standard 1170.2 - 2011
- Engineer Certified for Cyclone Rated Wind Region C as per Australian Standard 1170.2 - 2011
- Aluminium for durability in harsh environments
- Fully welded for strength
- Gas struts
- Heavy duty bolted locks
- Weather tight gasket seals

SIZING

600 x 600
800 x 800
800 x 1000

WHERE TO USE

Ideal for the cyclone regions of northern Australia. Commonly used on Industrial buildings and high rise for maintenance to rooftop plant equipment. Can also be used on residential homes.

Ideal for:



MANUFACTURE

Flashing and Lid

STANDARD MATERIALS
3mm aluminium welded for superior strength.

STANDARD FINISH

Mill

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

LOCKS

The Access Hatch comes standard with two internal lockable latches that can be padlocked. An pad bolt lock is available as an option.

FIRE RATING

Roof access is manufactured from non-combustible materials and creates a non-combustible lining to the roof.

HINGING

Stainless steel hinges. Can be hinged on either short or long sides. Short side is the standard hinge fixing.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/metal-roof-access-hatch



Metal Lid Hatch

ELECTRIC OPENING

The Electric Opening Metal Lid Roof Hatch is used in applications where a large roof hatch is required and manual operation is not possible, or in scenarios where a hatch needs to be opened remotely. Sizes range from 600 x 600mm. Custom sizes are available and have been made up to 2500 x 6000mm.

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

■ Mill

CUSTOM MATERIAL OPTIONS

■ Stainless Steel ■ Aluminium ■ Copper
 ■ Galvanised ■ Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

ELECTRIC OPENING

Hatch opens by Electric Actuators and can be hard wired to a wall switch or hand held remote control.

SIZES

Sizes range from 600 x 600mm and has been made up to 2500 x 6000mm.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/metal-roof-access-hatch



The Skyspan Electric Opening Hatch is manufactured to comply with the Australian Standards and is covered by a seven (7) year guarantee.

*12 months warranty on electrics.



Skylight Hatch


Ideal for both commercial and domestic applications, the Skyspan Skylight Hatch is a sturdy built access hatchway for safe access/egress to the roof space for numerous applications and also a provision of natural lighting and ventilation to the building.

- Acrylic dome
- Zinalume® steel flashing
- Concealed gas struts
- 2 x lockable latches
- Flashing to suit all Australian roof types included
- 0.75mm Australian zinalume steel for durability
- Leakproof flashing spot welded for strength
- Powdercoated to match all Colorbond® roof colours



7 YEAR WARRANTY

The Skyspan Skylight Hatch is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.

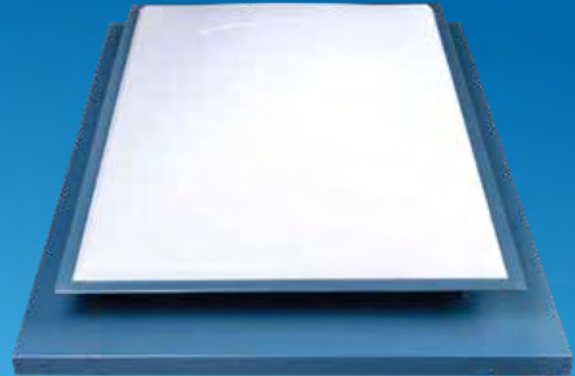

WHERE TO USE

Skyspan's Roof Access Hatch fits all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Commonly used in Industrial buildings and high rise for maintenance to rooftop plant equipment. Can also be used on residential homes.

Ideal for:



Easy grip handle for opening.



Concealed gas struts.



Two internal lockable latches.

SIZING

- 500 x 700
- 500 x 1100
- 600 x 600
- 600 x 900
- 600 x 1200
- 800 x 800
- 800 x 1100
- 900 x 900
- 900 x 1200
- 1000 x 1000
- 1100 x 1100

Custom sizing available.

LOCKS

The Access Hatch comes standard with two internal lockable latches that can be padlocked. A pad bolt lock is available as an option.

MANUFACTURE

Flashing and Frame

STANDARD MATERIALS
0.75mm Zinalume® steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

Stainless Steel	Aluminium	Copper
Galvanised	Colorbond® Ultra	

STANDARD FINISH
 Mill

CUSTOM FINISH
Powder coated to match **Colorbond** colour range.

Dome
STANDARD MATERIALS
Formed 3mm acrylic.
4.5mm for larger sizes.

STANDARD COLOUR
 Opal (White Translucent)

CUSTOM COLOUR OPTIONS
 Grey Tint Clear

Roof pitch range: **0°-50°**

HINGING

Hatches can be hinged on either short or long sides. Short side is the standard hinge fixing.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/skylight-hatch

	ENERGY RATING*	VLT 98% / SC .098 / SHGC .85 / U-Value 5.5
	BAL RATING - LOW	Complies with Bushfire AS 3959-2009

* In closed position only, Ember Guard is required for roof pitches below 18°.




Ezi-Slider Hatch®

MSH MODEL

Skyspan Ezi-Slider Sliding Access Hatchway system is ideal for high wind areas due to its low profile slide open action. Sturdy built from Zinalume steel, the Ezi-Slider offers easy and secure access to the roof space. Optional double skinned lid available for increased insulation.

- Single skin Zinalume steel lid
- Ball Bearing Slides
- Slide bolt for secure locking
- Flashing to suit all Australian roof types included
- 0.75mm Australian zinalume steel for durability
- Leakproof flashing spot welded for strength
- Powdercoated to match all Colorbond® roof colours

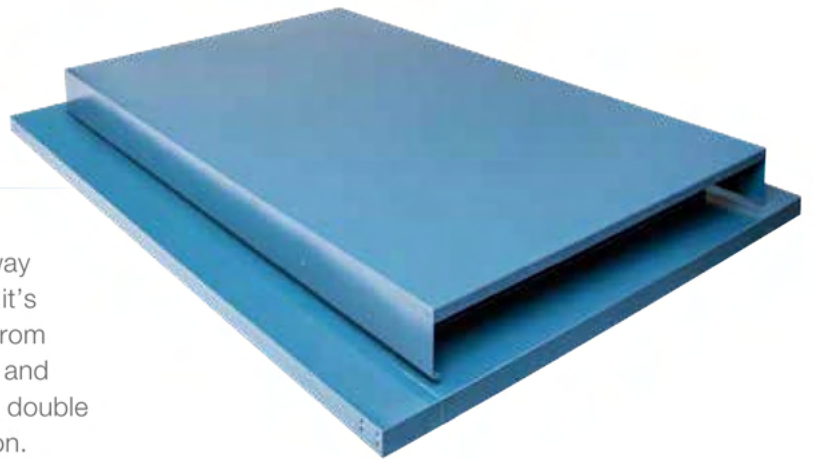

The Skyspan Ezi-Slider Hatch is manufactured to comply with the Australia Standard AS4285 and is covered by a seven (7) year guarantee.



Slide bolt for secure locking.



Ball bearing slides for easy opening.



Easy grip handle for opening.



Rubber waterproof strips to stop leaks.



WHERE TO USE

Skyspan's Roof Access Hatch fits all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Commonly used in Industrial buildings and high rise for maintenance to rooftop plant equipment. Can also be used on residential homes.



Roof pitch range: LANDSCAPE 0°-5° PORTRAIT 0°-10°

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

Stainless Steel Aluminium Copper
 Galvanised Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

LOCKS

The access hatch comes standard with a pad bolt lock for security.

FIRE RATING

Roof Access is manufactured from non-combustible materials and creates a non-combustible lining to the roof.

SIZING

900 x 900
 800 x 1200
 1000 x 1500

Custom sizing available.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/ezislider-access-hatch



SKYSPAN
AUSTRALIA PTY LTD

Nation wide delivery

Skyspan has one of the largest and most extensive ranges of skylight stocks in Australia. From Sydney to Perth, Darwin to Adelaide, Melbourne to Broome, Cairns to Albany we've got you covered.

QLD

NSW

ACT

VIC





Skyspan Online

Features and benefits of using the Skyspan

Comprehensive product information available



Technical Drawings

Model	Material	Weight	Lead Time
SKY-1000	Aluminum	15kg	2-3 weeks
SKY-1500	Aluminum	25kg	2-3 weeks
SKY-2000	Aluminum	35kg	2-3 weeks
SKY-2500	Aluminum	45kg	2-3 weeks
SKY-3000	Aluminum	55kg	2-3 weeks
SKY-3500	Aluminum	65kg	2-3 weeks
SKY-4000	Aluminum	75kg	2-3 weeks
SKY-4500	Aluminum	85kg	2-3 weeks
SKY-5000	Aluminum	95kg	2-3 weeks
SKY-5500	Aluminum	105kg	2-3 weeks
SKY-6000	Aluminum	115kg	2-3 weeks
SKY-6500	Aluminum	125kg	2-3 weeks
SKY-7000	Aluminum	135kg	2-3 weeks
SKY-7500	Aluminum	145kg	2-3 weeks
SKY-8000	Aluminum	155kg	2-3 weeks
SKY-8500	Aluminum	165kg	2-3 weeks
SKY-9000	Aluminum	175kg	2-3 weeks
SKY-9500	Aluminum	185kg	2-3 weeks
SKY-10000	Aluminum	195kg	2-3 weeks

Size

BASIC STOCK SIZES

These are available in Australia

Skylight	Weight
1000 x 1000	15.5 kg
1500 x 1000	25.5 kg
2000 x 1000	35.5 kg
2500 x 1000	45.5 kg
3000 x 1000	55.5 kg
3500 x 1000	65.5 kg
4000 x 1000	75.5 kg
4500 x 1000	85.5 kg
5000 x 1000	95.5 kg
5500 x 1000	105.5 kg
6000 x 1000	115.5 kg
6500 x 1000	125.5 kg
7000 x 1000	135.5 kg
7500 x 1000	145.5 kg
8000 x 1000	155.5 kg
8500 x 1000	165.5 kg
9000 x 1000	175.5 kg
9500 x 1000	185.5 kg
10000 x 1000	195.5 kg

Installation Instructions

Maintenance & Repair




Product pricing and online ordering

All product pricing and can be found at the Skyspan website. Follow the simple steps below to customise your selection. Once selected, you can even order and pay for your product instantly for fast delivery to your location.

Login into your account for Trade pricing.
Visit www.skyspan.com.au

Navigate to the preferred Skyspan product.

Utilise the product selector drop-down menus to customise your selection.

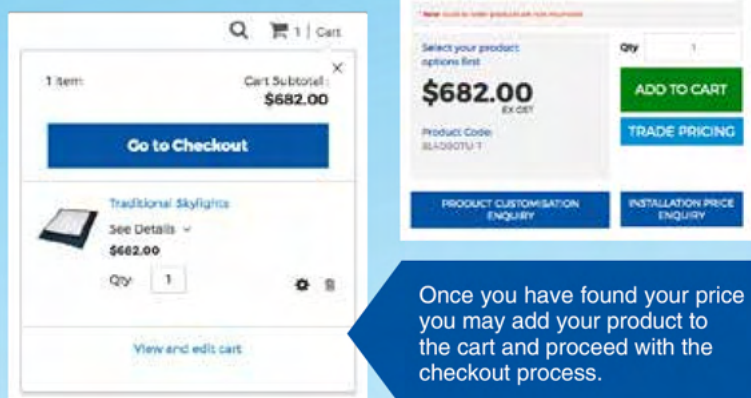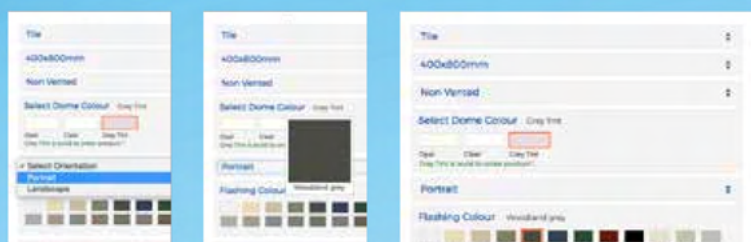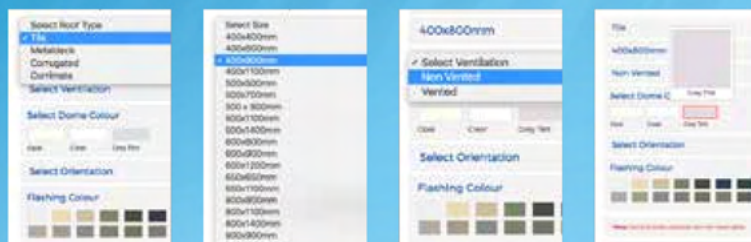

Once you have found your price you may add your product to the cart and proceed with the checkout process.



1300 SKYSPAN (759 772)

sales@skyspan.com.au

skyspan.com.au