



SKYSPAN
AUSTRALIA PTY LTD



Skywindow Fixed



1300 SKYSPAN (759 772)

skyspan.com.au

Skywindow Fixed


The Skyspan Skywindow GSL is a Fixed Glass Skylight that combines room enhancing natural light with an externally stylish roof matching frame.

The Clear Double Glazed Glass affords excellent thermal barriers to the heat in summer and the cold in winter while simultaneously providing a clear view to the daylight and night sky. As a made to order product, the standard sizes and features do not restrict the product make up as the Skywindow GSL can be custom made with options for alternative sizes and materials.

WHERE TO USE

Skyspan's Traditional skylight fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.

TYPICAL INSTALLATIONS

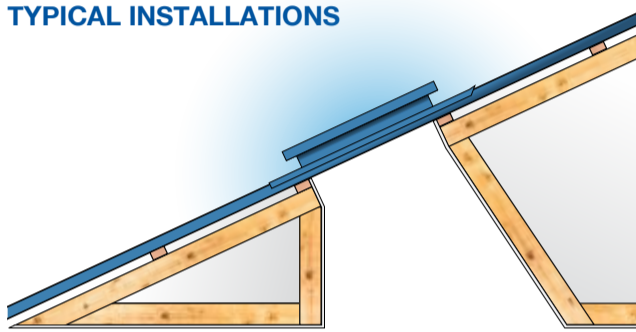

Roof pitch range: 0°-45°

Ideal for:



RATINGS



ENERGY*

	U-Value	SHGC
Clear	1.6	0.61
White Translucent	2.5	0.55
Neutral Tint	1.6	0.45
Grey Tint	1.7	0.33
Premium Glass	1.9	0.28



BAL RATING - 29**

Complies with Bushfire AS 3959-2009**

**Ember Guard is need for roof pitch below 18°.

MANUFACTURE

Flashing and Frame

STANDARD MATERIALS

Aluminium frame welded for superior strength.
0.75mm Zincalume® flashing.

CUSTOM MATERIAL OPTIONS

Stainless Steel
Copper
Galvanised
Colorbond® Ultra

CUSTOM FINISH

Powder coated to match Colorbond colour range.

STANDARD FINISH

Mill

Glazing (Complies with AS1288)

STANDARD GLAZING

Clear

STANDARD COLOUR

Neutral
Grey Tint
White
Blue
Translucent

SIZING

Dimensions in millimeters.

Square	Rectangle
500 x 500	400 x 800
600 x 600	400 x 1100
650 x 650	500 x 700
800 x 800	500 x 1100
900 x 900	500 x 1400
1000 x 1000	600 x 900
1100 x 1100	600 x 1200
1200 x 1200	650 x 1100
	800 x 1100
	800 x 1400


GLAZING

Laminated glass must be used for skylights installed 3m or more above floor level. (AS1288)

Performance Laminated Glazing (Standard)

Laminate glass resists impact protection.

PVB interlayer eliminates 99% of UV.

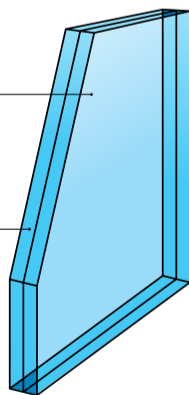


Comfort Double Glazing (Optional)

Argon filled cavity increases energy efficiency.


Low-E coating maximises light transmittance & reduces solar heat gain.

Laminated inner glass resists impact protection. PVB interlayer eliminates 99% of UV.

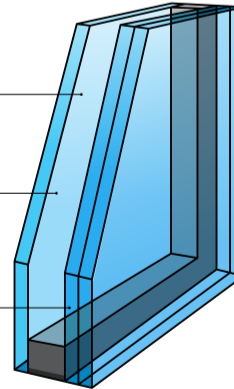

FLASHING

CORRUGATED

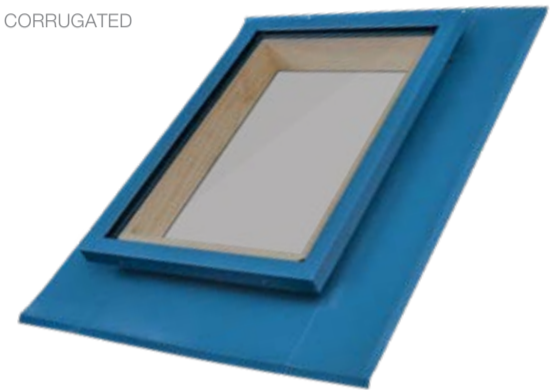

METALDECK



TILE



FURTHER ONLINE INFORMATION

INSTALLATION INSTRUCTIONS skyspan.com.au/installation

TECHNICAL DRAWINGS skyspan.com.au/drawings

PRICES skyspan.com.au/traditional-skylight

7 YEAR WARRANTY

The Skyspan Traditional Skylight is manufactured to comply with the Australian Standard AS4285 and is covered by a **seven (7) year guarantee**.



1300 SKYSPAN (759 772)
sales@skyspan.com.au skyspan.com.au

