




SKYSPAN
AUSTRALIA PTY LTD



Velux Flat Roof Skylight Flashing

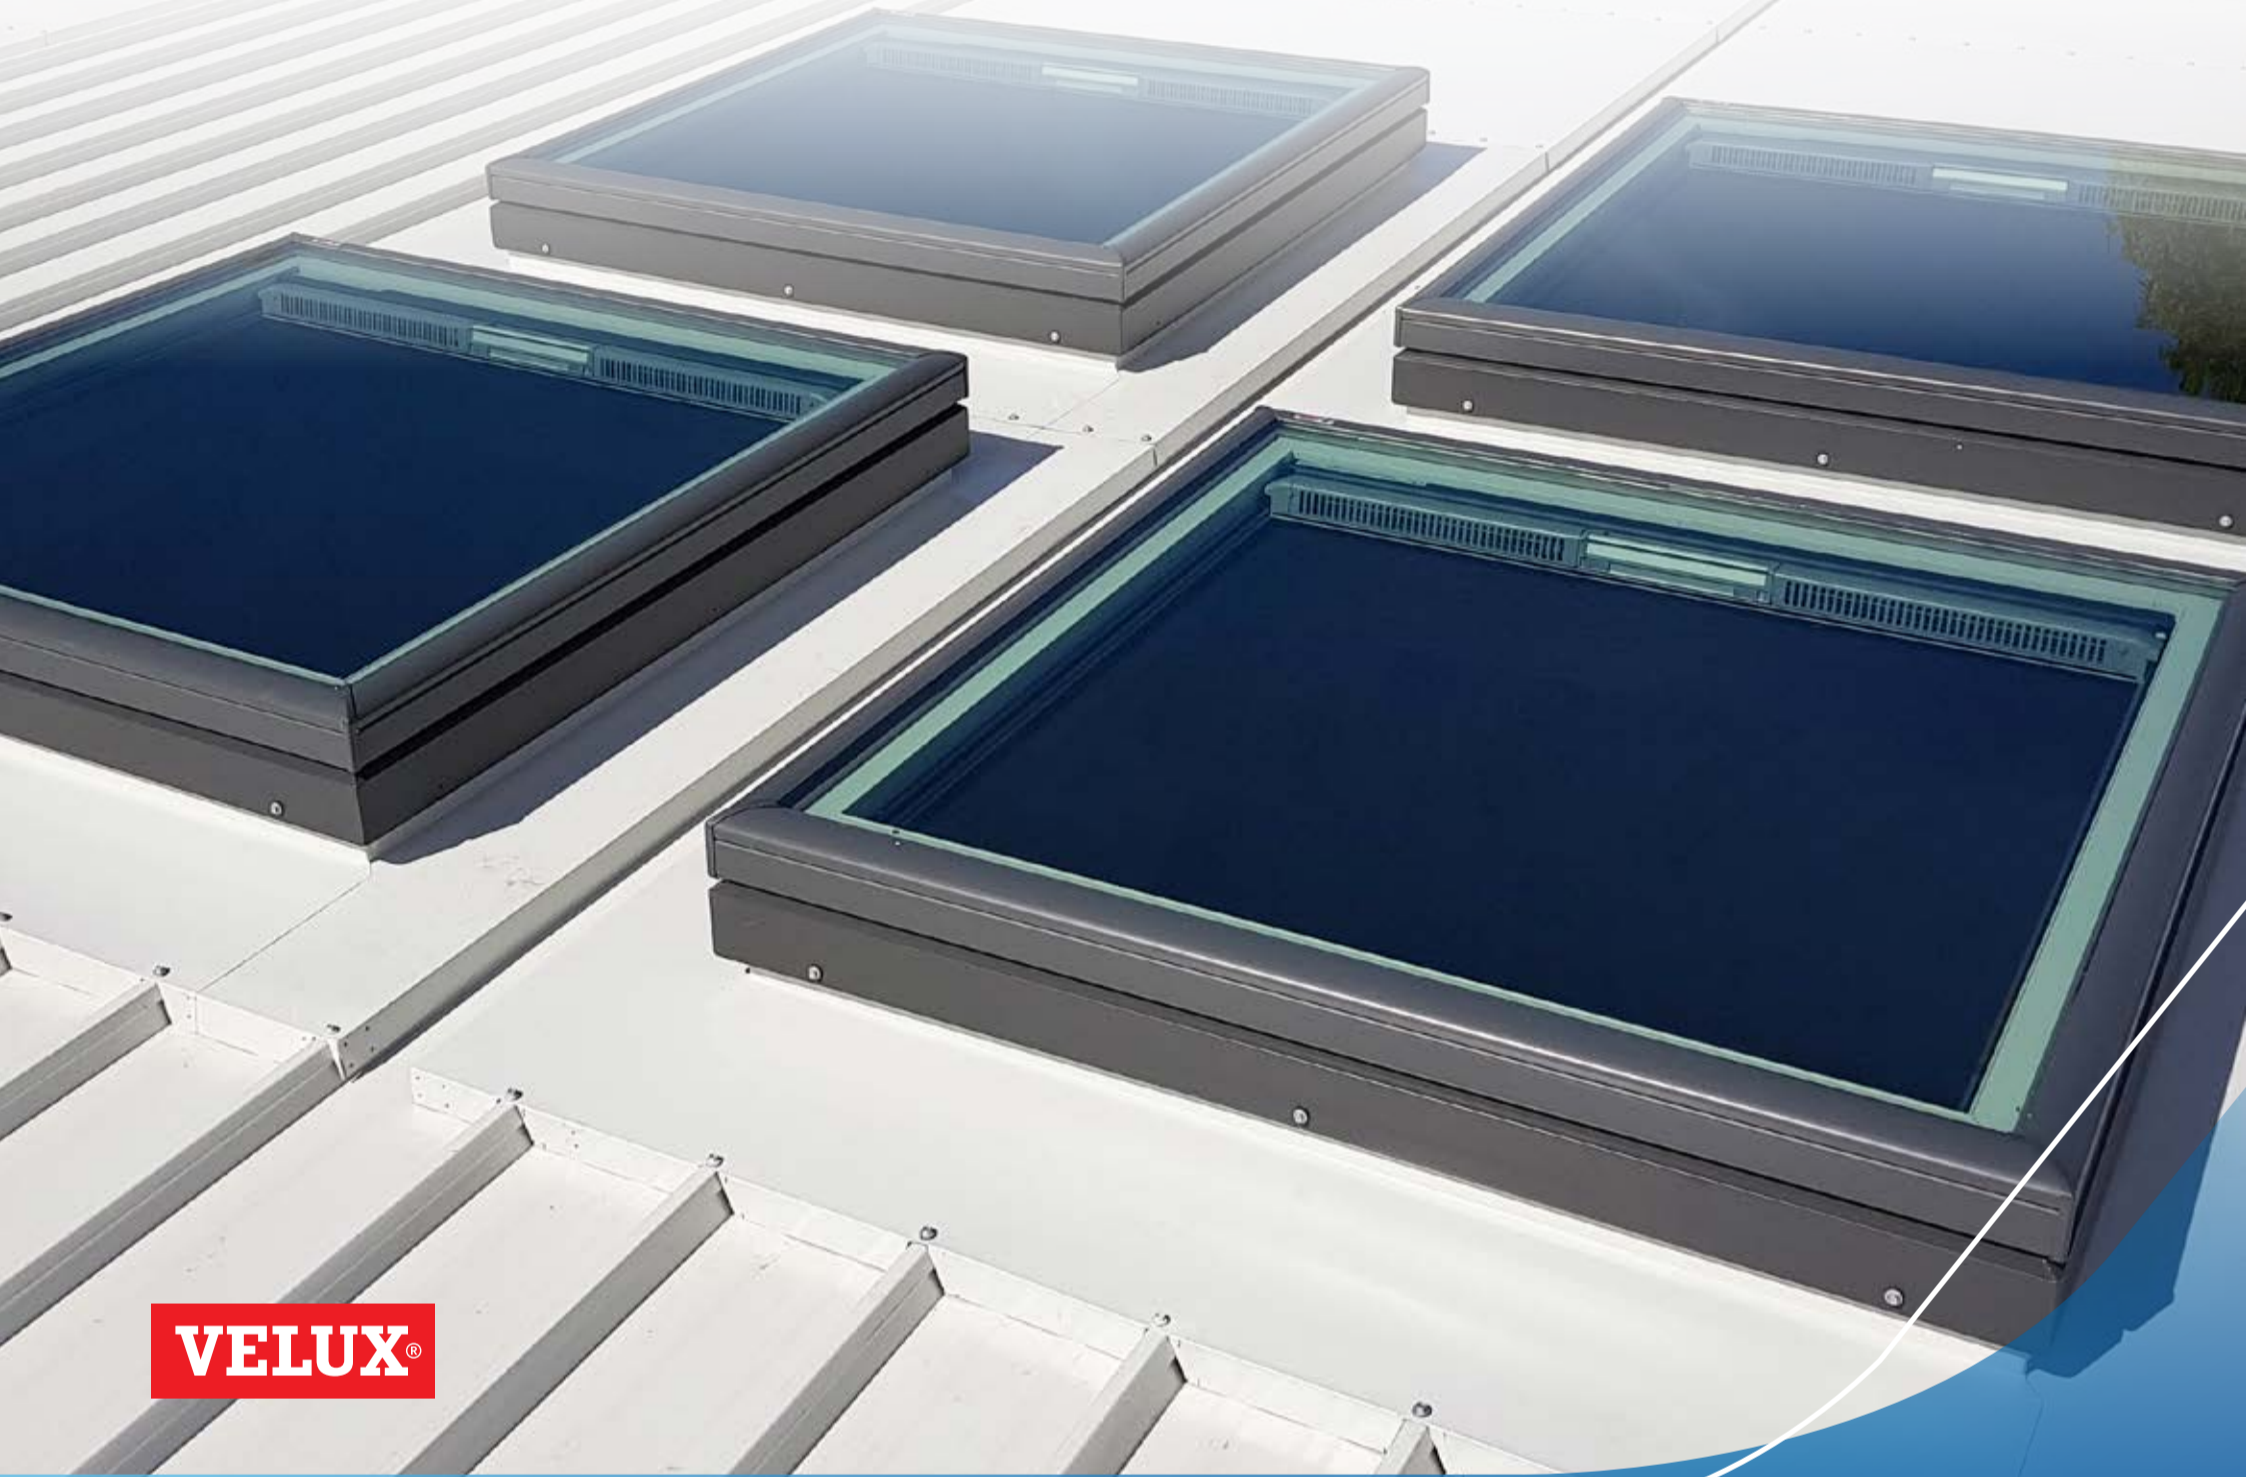

FOR ROOF PITCH - ABOVE 5°



1300 SKYSPAN (759 772)
skyspan.com.au

Velux Flat Roof Skylight Flashing

Custom Skylight Flashing are used to install Velux Flat Roof Skylights when the roof pitch is above 5°.

Velux Flat Roof Skylights do not come with any flashings so a custom flashing is needed so it can be installed. Skyspan Custom Skylight Flashings are used to install Velux Pitched Skylights onto Tile, Corrugated, Metaldeck and Concrete Roofs. Included with the Flashing is a Timber hob for the FCM to be mounted to and the plasterboard shaft to be fixed to. The Flashings are spot welded together in one piece saving the time of building a flashing and can be Powdercoated to match Colorbond Roofing colours reducing the colour contrast on the roof.



FOR ROOF PITCH - ABOVE 5°

VELUX MODELS COMPATIBLE



FCM
Fixed
Non-Opening



VCM
Manual
Opening



VSC
Solar
Opening

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS
0.75mm Zincalume® steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

-  Stainless Steel
-  Copper
-  Galvanised
-  Colorbond® Ultra
-  Aluminium

CUSTOM FINISH

Powder coated to match Colorbond colour range.

STANDARD FINISH

-  Mill

ROOF PITCH

Roof pitch range:  5°-90°

SIZING

All Velux Pitch Skylight sizes.



FLASHINGS


METALDECK



CORRUGATED



TILE

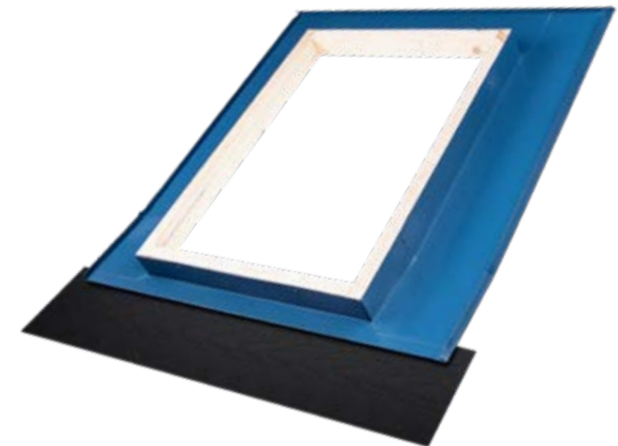

FURTHER ONLINE INFORMATION

INSTALLATION INSTRUCTIONS skyspan.com.au/installation

TECHNICAL DRAWINGS skyspan.com.au/drawings

PRICES skyspan.com.au/traditional-skylight

7 YEAR WARRANTY

The Skyspan Traditional Skylight is manufactured to comply with the Australian Standard AS4285 and is covered by a **seven (7) year guarantee**.



1300 SKYSPAN (759 772)
sales@skyspan.com.au skyspan.com.au

