





SKYSPAN
AUSTRALIA PTY LTD

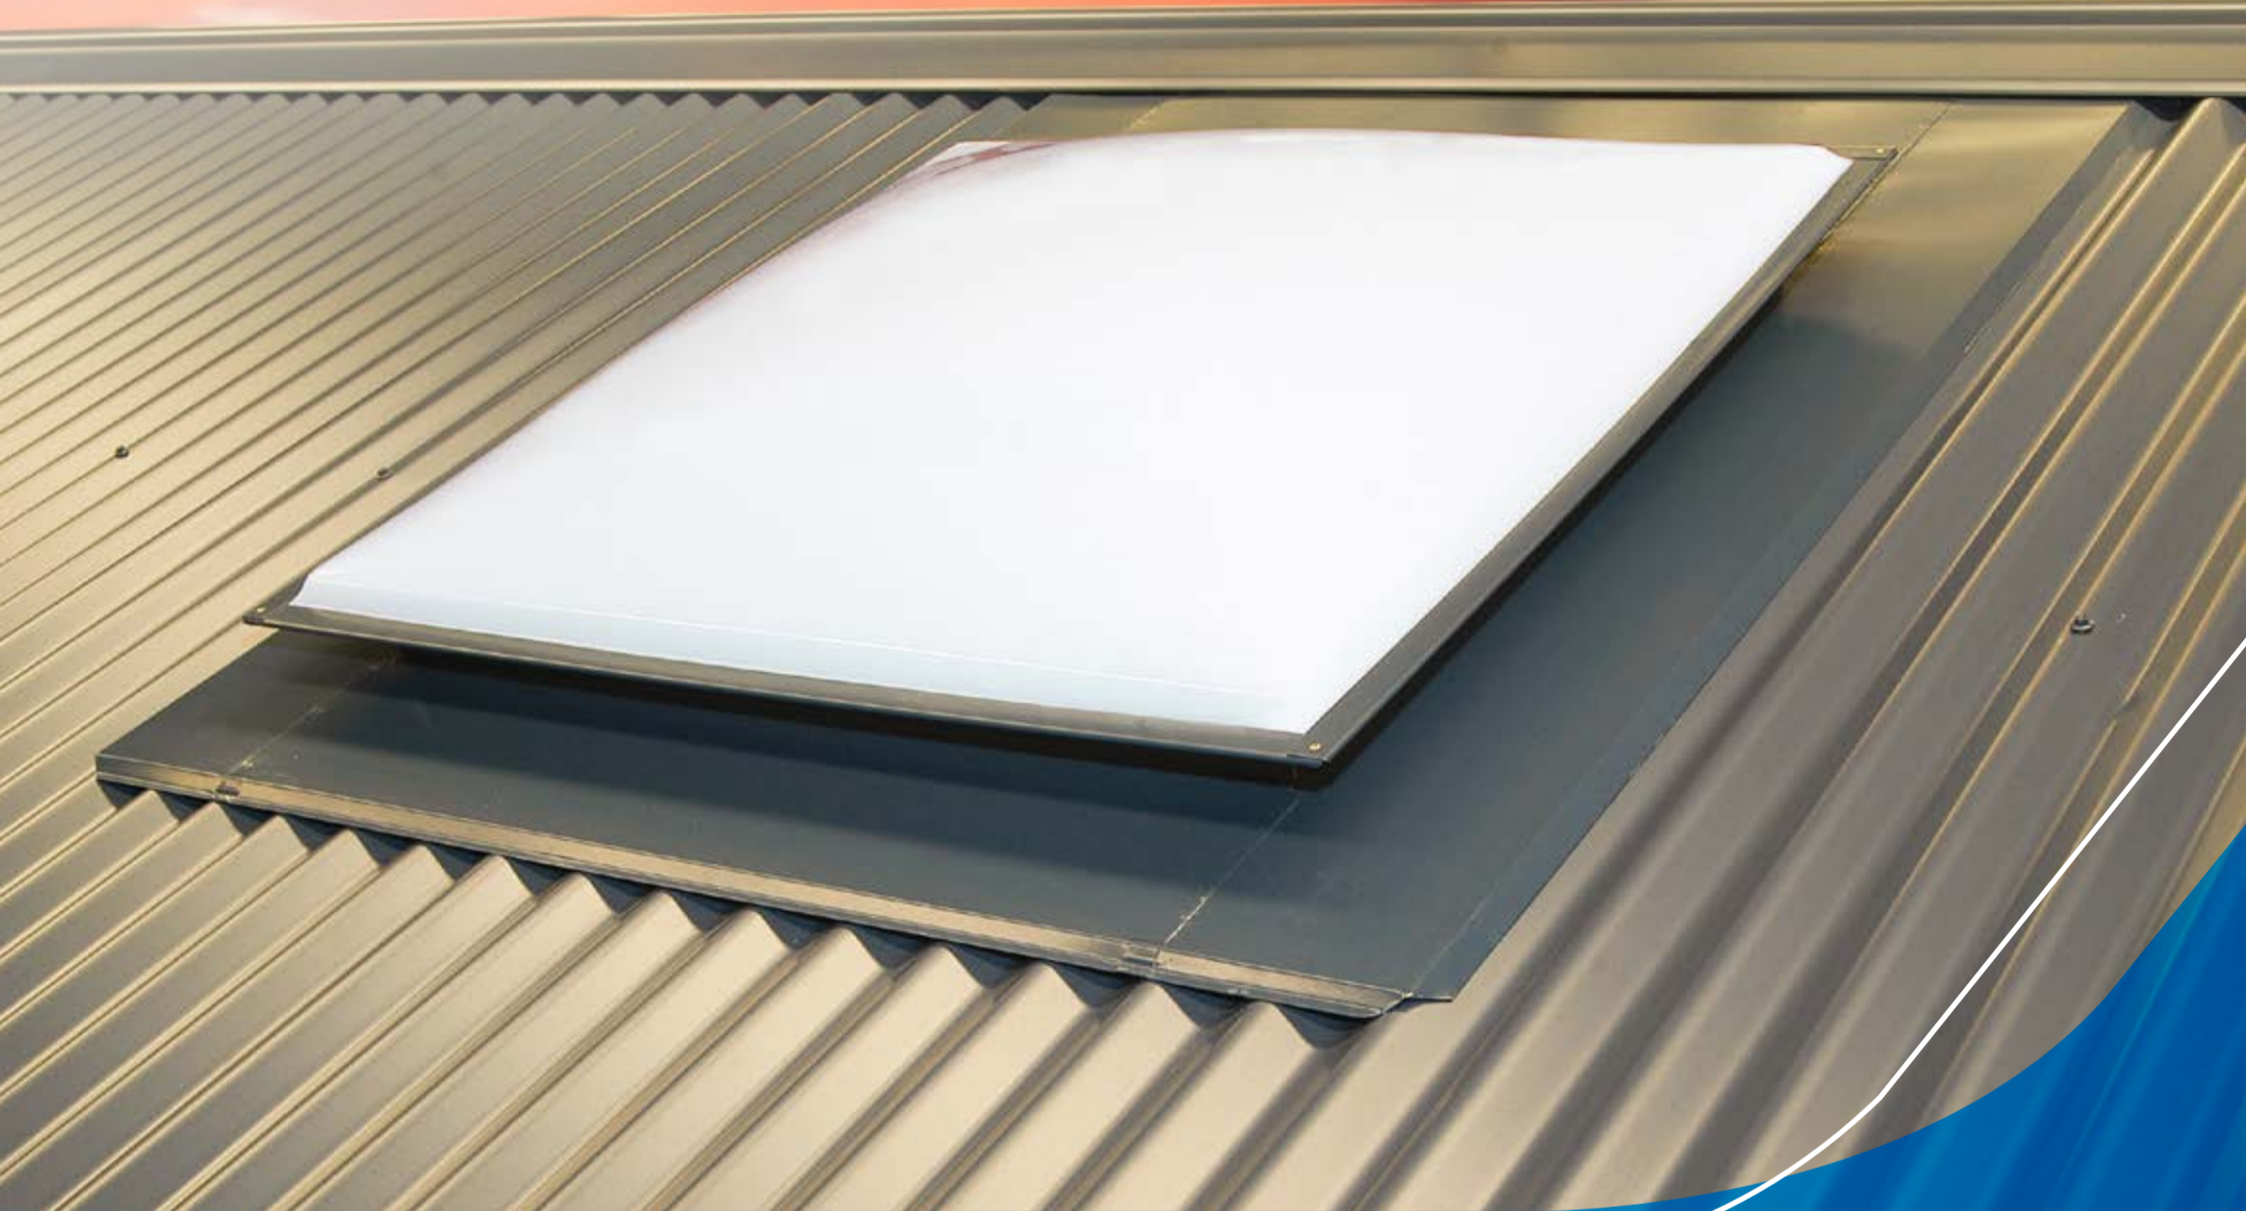

Traditional Skylights

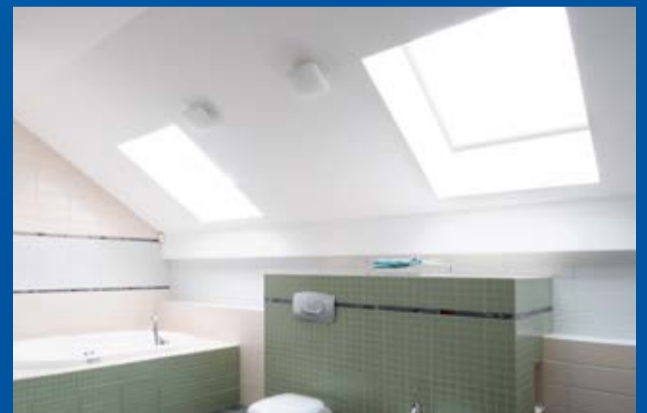

1300 SKYSPAN (759 772)

skyspan.com.au

Traditional Skylights

The Traditional Skylight is the most common Skylight, it has proved itself in Australia's climate as a tough and resilient product for over 45 years.

A beautiful rich natural light is provided that is then softened and rounded by the opal dome that filters the harsh direct rays from the sun. Traditional Skylights are installed to the roof and connected to the room below by a Gyprock shaft. Rooms are provided with natural light and the option of ventilation, away from the exterior walls, in a cost and energy efficient way. The Traditional Skylight is designed for economy, a low roof silhouette and easy installation whilst bringing in abundant natural light.



WHERE TO USE


Skyspan's Traditional skylight fit all Australian roof types including Corrugated, Metaldecks, Tile Roofs and Concrete Roofs. Suitable for any room where structurally compatible.

Ideal for:




TYPICAL INSTALLATIONS

Typical installation with plasterboard light shaft

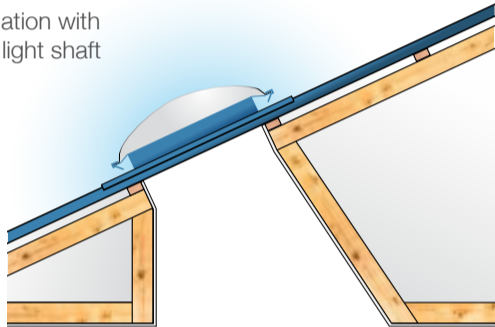

Typical installation with optional flexible shaft kit

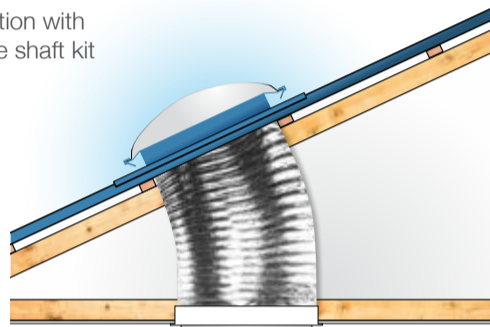

MANUFACTURE

Flashing and Frame

STANDARD MATERIALS
0.75mm Zinalume®, steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

CUSTOM FINISH
Powder coated to match Colorbond colour range.

STANDARD FINISH
Mill

Roof pitch range: 0°-50°

RATINGS

	U-Value	5.5
	SHGC	0.64
	VLT	0.66

	Complies with Bushfire AS 3959-2009
--	-------------------------------------

* Energy rating figures refer to clear acrylic glazing only.

SIZING

Dimensions in millimeters.


Square	Rectangle
400 x 400	400 x 600
500 x 500	400 x 800
600 x 600	400 x 1100
650 x 650	500 x 700
800 x 800	500 x 1100
900 x 900	500 x 1400
1000 x 1000	600 x 900
1100 x 1100	600 x 1200
1200 x 1200	650 x 1100
1500 x 1500	800 x 1100
1800 x 1800	800 x 1400
2000 x 2000	900 x 1200
2200 x 2200	900 x 1500
2400 x 2400	1000 x 2200
	1600 x 2400
	1800 x 2600

Custom sizing up to 2400mm


FLASHING TYPES




CORRIMATE™

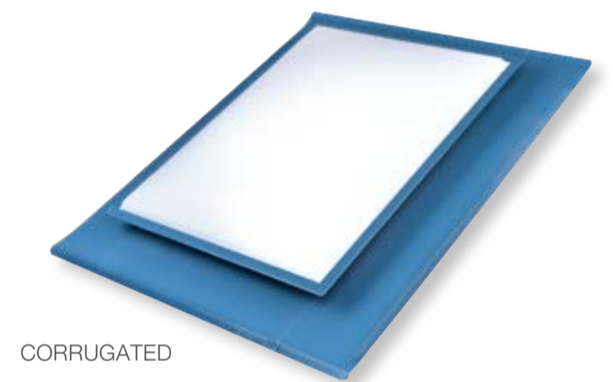

CORRUGATED

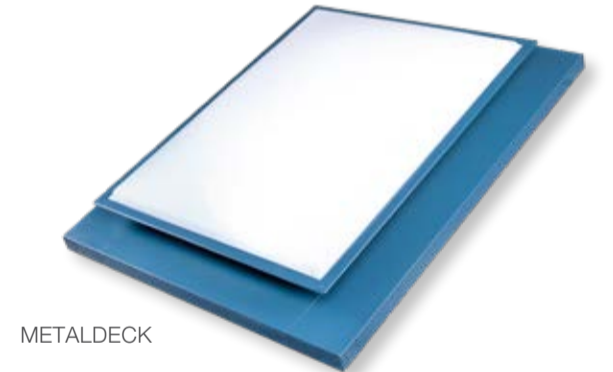

METALDECK

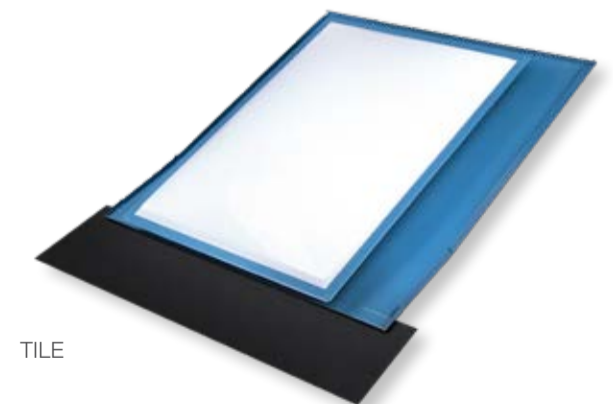

TILE

VENTILATION TYPES


Non Vented

The skylight has no ventilation system. This is the standard skylight and is used in most rooms.




Passive Ventilation

The frame under the dome is perforated. This allows for hot air to naturally rise drawing steam and odours outside.



Skylight Fan

An exhaust fan fixed inside the skylight mechanically draws up air, steam and odours before forcing them outside via the ventilation perforations in the skylight frame.



7 YEAR WARRANTY

The Skyspan Traditional Skylight is manufactured to comply with the Australian Standard AS4285 and is covered by a **seven (7) year guarantee**.

FURTHER ONLINE INFORMATION

INSTALLATION INSTRUCTIONS skyspan.com.au/installation

TECHNICAL DRAWINGS skyspan.com.au/drawings

PRICES skyspan.com.au/traditional-skylight



1300 SKYSPAN (759 772)
sales@skyspan.com.au skyspan.com.au

